

butech.[®]

PORCELANOSA Grupo



This catalogue is protected under the Spanish Intellectual Property Act (Royal Decree 1/1996). Any persons that reproduce its contents, in whole or in part, without the express consent of Porcelanosa Group will be subject to punitive action under the Spanish Criminal Code.



**tile
installation
solutions**

butech.
PORCELANOSA Grupo



tile installation solutions

BONDING MATERIALS

Cement-based adhesives

- 8 cerancol
- 9 tixocem
- 10 tixocem plus
- 11 flexitec n
- 12 flexitec n sp
- 13 fr-one n
- 14 fr-one especial
- 16 one-flex n
- 17 one-flex n sp
- 18 rapimax n
- 19 maxifluid
- 20 super-one n

Additives for cement-based adhesives

- 21 unilax
- 22 fonolax

Plaster-based adhesives

- 23 super-an

Dispersion adhesives

- 24 bt-1000 n
- 25 bt-3000 n

Reactive-resin adhesives

- 26 politech

GROUTING MATERIALS

High-tech cement-based mortars

- 27 colorstuk 0-4
- 28 colorstuk 2-12
- 29 colorstuk rapid n
- 30 colorstuk especial

Grout additives

- 31 cl-stuk

Epoxi-based grout

- 32 epotech
- 33 epotech aqua

Elastic joint sealants

- 34 s-107 n
- 35 s-107
- 36 p-404
- 37 s-502

SUBSTRATE PREPARATION PRODUCTS

Self-levelling mortar

- 38 level 1

Primer

- 39 uniprim

Mortar additive

- 40 unicem

Cleaners

- 41 acid net
- 42 basic gel

Tile laying tips

butech.
PORCELANOSA Grupo

cerancol

A cement-based adhesive for laying absorbent ceramic tiles in indoor environments. Thixotropic.



cement-based adhesives

cerancol

cerancol is a simple, effective solution for laying absorbent ceramic tiles on indoor cement-rendered walls and floors. With cerancol, tiles can be laid on a medium-bed layer of adhesive of up to 12 mm on uneven substrates. Also suitable for tiles laid directly on brick partition walls.

The composition and characteristics of this adhesive are designed to satisfy the needs of tile layers. cerancol is made of graded aggregates,

materials

Small and medium-format tiles.

Absorbent ceramic tiles:

Extruded tiles (Groups AIII and AI).

Porous single-fired and double-fired tiles (Group BIII).

Absorbent stoneware tiles (Group Bla, Blb).

coverage

tile	notched trowel (mm)	consumption
Up to 10x10 cm	U4	1-2 kg/m ²
Up to 20x20 cm	U6	2-3 kg/m ²
Up to 30x30 cm	U8	3-4 kg/m ²
Up to 40x40 cm	U10 (floating and buttering method)	4-5 kg/m ²

presentation

code	product	packaging (kg)	palet (kg)	price
B10903003	cerancol blanco	25	1200	0,31€
B10904004	cerancol gris	25	1200	0,28€

applications

substrates:

Cement-lime mortars.

Cement mortars:

- Cement render.

- Cement floor screeds..

Do not use on plaster, wood, PVC, rubber or metal surfaces or those substrates subject to strong movements. In such cases, use politech.

uses

Interior and exterior floors.

Residential use.

tixocem

A cement-based adhesive for laying absorbent ceramic tiles in indoor environments using the thin-bed method. Thixotropic.



cement-based adhesives

tixocem

tixocem is a simple, effective solution for laying absorbent ceramic tiles on cement-based substrates. With tixocem, absorbent tiles can be laid on walls and floors both indoors and out. Resistant to frost and ice.

Tixocem is made of graded aggregates, highly resistant cements and organic additives. Designed to ensure optimal workability, with extended working times, thixotropic properties and no sagging.



materials

Small and medium-format tiles.

Ceramic tiles > 3 % absorption rate:

- Extruded tiles de absorción (Groups AIII and AI).

- Porous single-fired and double-fired tiles (Group BIII).

- Absorbent stoneware tiles (Group Bla).

coverage

tile	notched trowel (mm)	consumption
Up to 10x10 cm	U4	1-2 kg/m ²
Up to 20x20 cm	U6	2-3 kg/m ²
Up to 30x30 cm	U8	3-4 kg/m ²
Up to 40x40 cm	U10 (floating and buttering method)	4-5 kg/m ²

presentation

code	product	packaging (kg)	palet (kg)	price
B11903003	tixocem blanco	25	1400	0,34€
B11904004	tixocem gris	25	1400	0,32€

applications

substrates:

Cement-lime mortars.

Cement mortars:

- Cement render.

- Cement floor screeds..

Do not use on wood, PVC, rubber or metal surfaces or those substrates subject to strong movements. In such cases, use politech.

uses

Interior and exterior floors.

Interior walls.

Residential use.



tixocem plus

A cement-based adhesive for laying tiles using the thin-bed method. Thixotropic.



tixocem plus

tixocem plus is an efficient, simple solution for laying tiles on cement, plasterboard or brick substrates. Suitable for laying indoor and outdoor floor tiles and indoor wall tiles.

Waterproof and resistant to ice and frost.

materials

Absorbent and non-absorbent ceramic tiles:

- Extruded tiles (Groups AIII, AI and Al).
- Single-fired and double-fired porous tiles (Group BIII).
- Vitrified tiles (Groups Bla and Blb).
- Porcelain tiles (Group Bla). Indoors only.

applications

substrates:

Cement/lime mortars.

Cement mortars:

Cement renders.

Cement-screeds.

Plasterboard

Brick.

Plaster*

coverage

tile	notched trowel (mm)	consumption
Up to 10x10 cm	U4	1-2 kg/m ²
Up to 20x20 cm	U6	2-3 kg/m ²
Up to 30x30 cm	U8	3-4 kg/m ²
Up to 40x40 cm	U10 (floating and buttering method)	4-5 kg/m ²

presentation

code	product	packaging (kg)	palet (kg)	price
B11906007	tixocem plus blanco	25	1200	0,43€

* Prime first with uniprim

In this case, treat the substrate first with uniprim primer. Do not use on wood, PVC, rubber or metal surfaces or those substrates subject to strong movements. In such cases, use politech.

uses

Indoor and outdoor floors.

Indoor walls.

Residential use

cement-based adhesives

flexitec n

A cement-based adhesive of average elasticity for laying absorbent ceramic, stoneware and porcelain tiles using the thin-bed method. Thixotropic.



flexitec n

flexitec is ideal for laying small and medium-format absorbent ceramic or porcelain tiles on cement-based or plasterboard substrates. With this adhesive, tiles can be laid on walls and floors both indoors and out.

flexitec is made of highly resistant cements and specific additives to ensure optimal workability and high coverage. It stands out for its extended working times, thixotropic properties and no sagging.



C1 / TE
EN 12004
25 kg.



materials

Small and medium-format tiles.

Absorbent and non-absorbent ceramic tiles:

- Extruded tiles (Groups AIII, AI and Al).
- Porous single-fired and double-fired tiles (Group BIII).
- Stoneware tiles (Groups Bla and Blb).
- Porcelain tiles (Group Blb).

coverage

tile	notched trowel (mm)	consumption
Up to 10x10 cm	U4	1-2 kg/m ²
Up to 20x20 cm	U6	2-3 kg/m ²
Up to 30x30 cm	U8	3-4 kg/m ²
Up to 40x40 cm	U10 (floating and buttering method)	4-5 kg/m ²

presentation

code	product	packaging (kg)	palet (kg)	price
B12901002	flexitec n gris	25	1000	0,77€
B12902003	flexitec n blanco	25	1000	0,81€

applications

substrates:

Cement-lime mortars.

Cement mortars:

- Cement render.
- Cement floor screeds.

Cellular concrete.

Plasterboard.

Plaster or anhydrite substrates.*

* In this case, treat the substrate first with uniprim primer. Do not use on wood, PVC, rubber or metal surfaces or those substrates subject to strong movements. In such cases, use politech.

uses

Interior and exterior floors.

Interior walls.

Residential use.

Urban decoration. Interior and exterior floors.

Interior walls.

Residential use.

Urban decoration.




C2 / TE
EN 12004
25 kg.



flexitec n SP

A cement-based adhesive of average elasticity for laying absorbent ceramic with dust free technology, stoneware and porcelain tiles using the thin-bed method. Thixotropic.

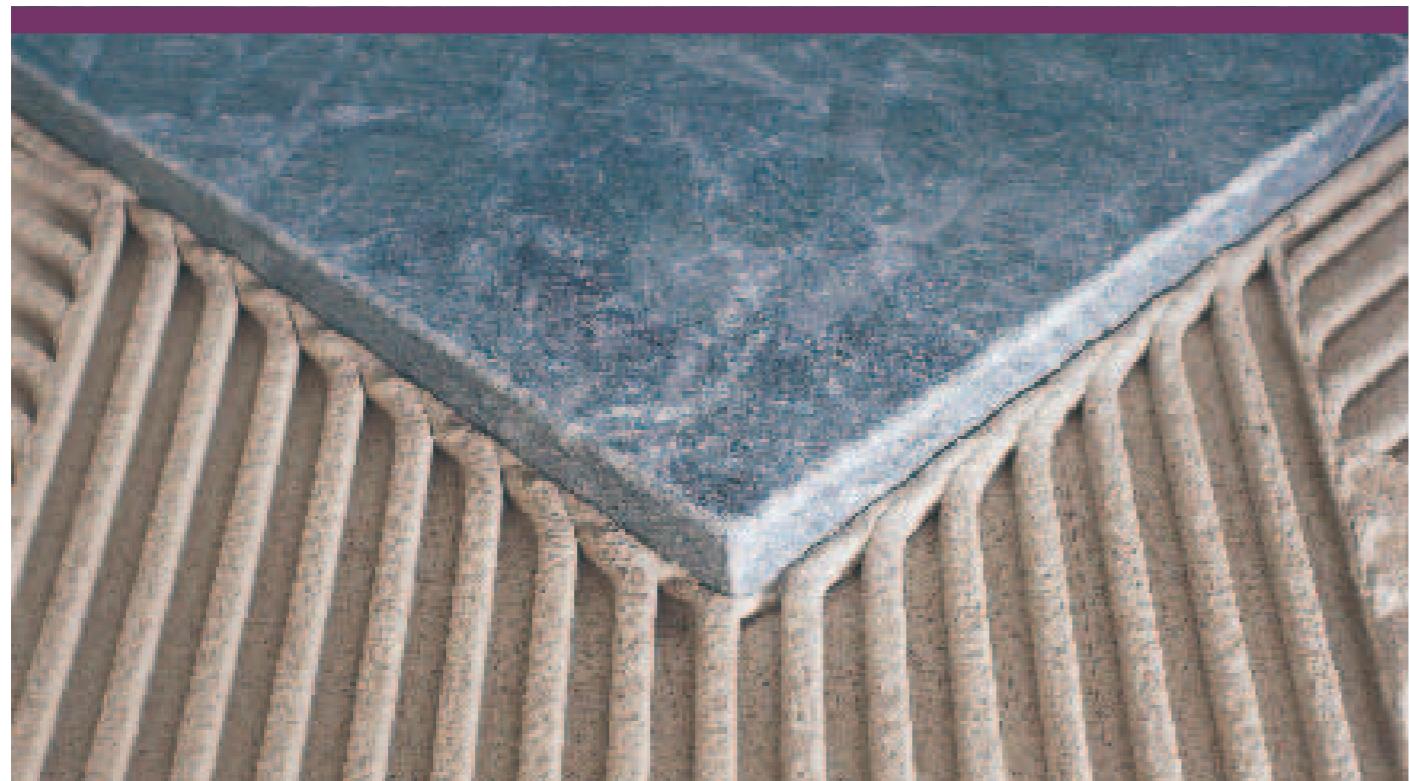

cement-based adhesives

flexitec n SP

flexitec n SP is ideal for laying small and medium-format absorbent ceramic or porcelain tiles on cement-based or plasterboard substrates. With this adhesive, tiles can be laid on walls and floors both indoors and out.

flexitec n SP is made of highly resistant cements and specific additives to ensure optimal workability and high coverage. It stands out for its extended working times, thixotropic properties and no sagging. The dust free technology provides a cleaner and securer job site.

materials

Small and medium-format tiles.

Absorbent and non-absorbent ceramic tiles:

- Extruded tiles (Groups AIII, AI and Al).
- Porous single-fired and double-fired tiles (Group BIII).
- Stoneware tiles (Groups Bla and Blb).
- Porcelain tiles (Group Blb).

applications

substrates:

Cement-lime mortars.

Cement mortars:

- Cement render.
- Cement floor screeds.

Cellular concrete.

Plasterboard.

Plaster or anhydrite substrates.*

* In this case, treat the substrate first with uniprim primer. Do not use on wood, PVC, rubber or metal surfaces or those substrates subject to strong movements. In such cases, use politech.

uses

Interior and exterior floors.

Interior walls.

Residential use.

Urban decoration.



coverage

tile	notched trowel (mm)	consumption
Up to 10x10 cm	U4	1-2 kg/m ²
Up to 20x20 cm	U6	2-3 kg/m ²
Up to 30x30 cm	U8	3-4 kg/m ²
Up to 40x40 cm	U10 (floating and buttering method)	4-5 kg/m ²

presentation

code	product	packaging (kg)	palet (kg)	price
B12600002	flexitec n sp gris	25	1000	1,06€
B12600001	flexitec n sp blanco	25	1000	1,14€

fr-one n

A cement-based adhesive with excellent technical properties. Suitable for all ceramic tile formats and types. Its flexibility and bonding strength make it ideal for porcelain tiles and cases where a high-performance bonding material is required.



cement-based adhesives

fr-one n

For commercial and industrial flooring, plasterboard substrates, floors with built-in underfloor heating etc.

fr-one has a special grain size so that it can be used as a medium-bed adhesive, evening out minor irregularities in the substrate. For final application thicknesses of up to 10 mm.

fr-one is specially recommended for use on façades and brick substrates.



materials

Small and medium-format tiles.

Absorbent and non-absorbent ceramic tiles:

- Extruded tiles (Groups AIII, AI and Al).
- Porous single-fired and double-fired tiles (Group BIII).
- Stoneware tiles (Groups Bla and Blb).
- Porcelain tiles (Group Bla).

Glass mosaics.

Natural stone and marble not prone to staining.

applications

substrates:

Cement-lime mortar.

Cement mortars:

- Cement render.
- Cement floor screeds.

Concrete.

Plasterboard.

Existing ceramic tiles.

Plaster or anhydrite substrates.*

*In this case, treat the substrate first with uniprim primer..

** Replace all the water in the mix with unilax additive.

Do not use on wood, PVC, rubber or metal surfaces or those substrates subject to strong movements. In such cases, use politech.

coverage

tile	notched trowel (mm)	consumption
Up to 10x10 cm	U4	1-2 kg/m ²
Up to 20x20 cm	U6	2-3 kg/m ²
Up to 30x30 cm	U8	3-4 kg/m ²
Up to 40x40 cm	U10 (floating and buttering method)	4-5 kg/m ²

presentation

code	product	packaging (kg)	palet (kg)	price
B12906008	fr-one n gris	25	1000	0,86€
B12907009	fr-one n blanco	25	1000	0,92€

uses

Interior and exterior floors.

Interior walls and exteriors.

Residential use and public use.

Heavy-traffic floors.

Floors with built-in underfloor heating.

Urban decoration.

Swimming pools.

Exterior façades.**

fr-one especial

cement-based adhesives

A high-performance, single-component, easy-to-use adhesive for laying ceramic tiles of all kinds. Specially recommended for plaster or anhydrite substrates, with no need to prime them first.



fr-one especial

fr-one especial meets the day-to-day needs of tile-laying professionals. Thanks to its versatility and high bonding strength, it can be used on substrates commonly found in building projects. Water and frost proof, fr-one especial is manufactured with avant-garde technology.

materials

Small, medium and large-format tiles.

Absorbent and non-absorbent ceramic tiles:

Extruded tiles (Groupes AIII, AI et Al).

Single and double-red porous tiles (Groupe BIII).

Stoneware tiles s (Groupes Bla et Blb).

Porcelain tiles (Groupe Bla).

Glass mosaics.

Natural stone and marble, not prone to staining.

applications

substrates:

Cement/lime mortars.

Cement mortars:

Cement renders.

Cement screeds.

Concrete.

Plasterboard.

Existing ceramic tiles.*

Plaster or anhydrite substrates.

* Absolutely clean, well-bonded ones. Use lamitech rst when bonding material to existing outdoor paving.

Formulated with selected aggregates and cements with a high resistance to sulphates, it has a high synthetic resin content. Thanks to its performance, it complies with



C2 / TE
EN 12004
25 kg.



coverage

tile	notched trowel (mm)	consumption
Up to 10x10 cm	U4	1-2 kg/m ²
Up to 20x20 cm	U6	2-3 kg/m ²
Up to 30x30 cm	U8	3-4 kg/m ²
Up to 40x40 cm	U10 (floating and buttering method)	4-5 kg/m ²

presentation

code	product	packaging (kg)	palet (kg)	price
B12909015	fr-one especial blanco	25	1000	1,18€

uses

Indoor and outdoor walls and floors.


Residential use.

Public venues.

Floors subject to high traffic.

Flooring with under-floor heating.

Urban decor.

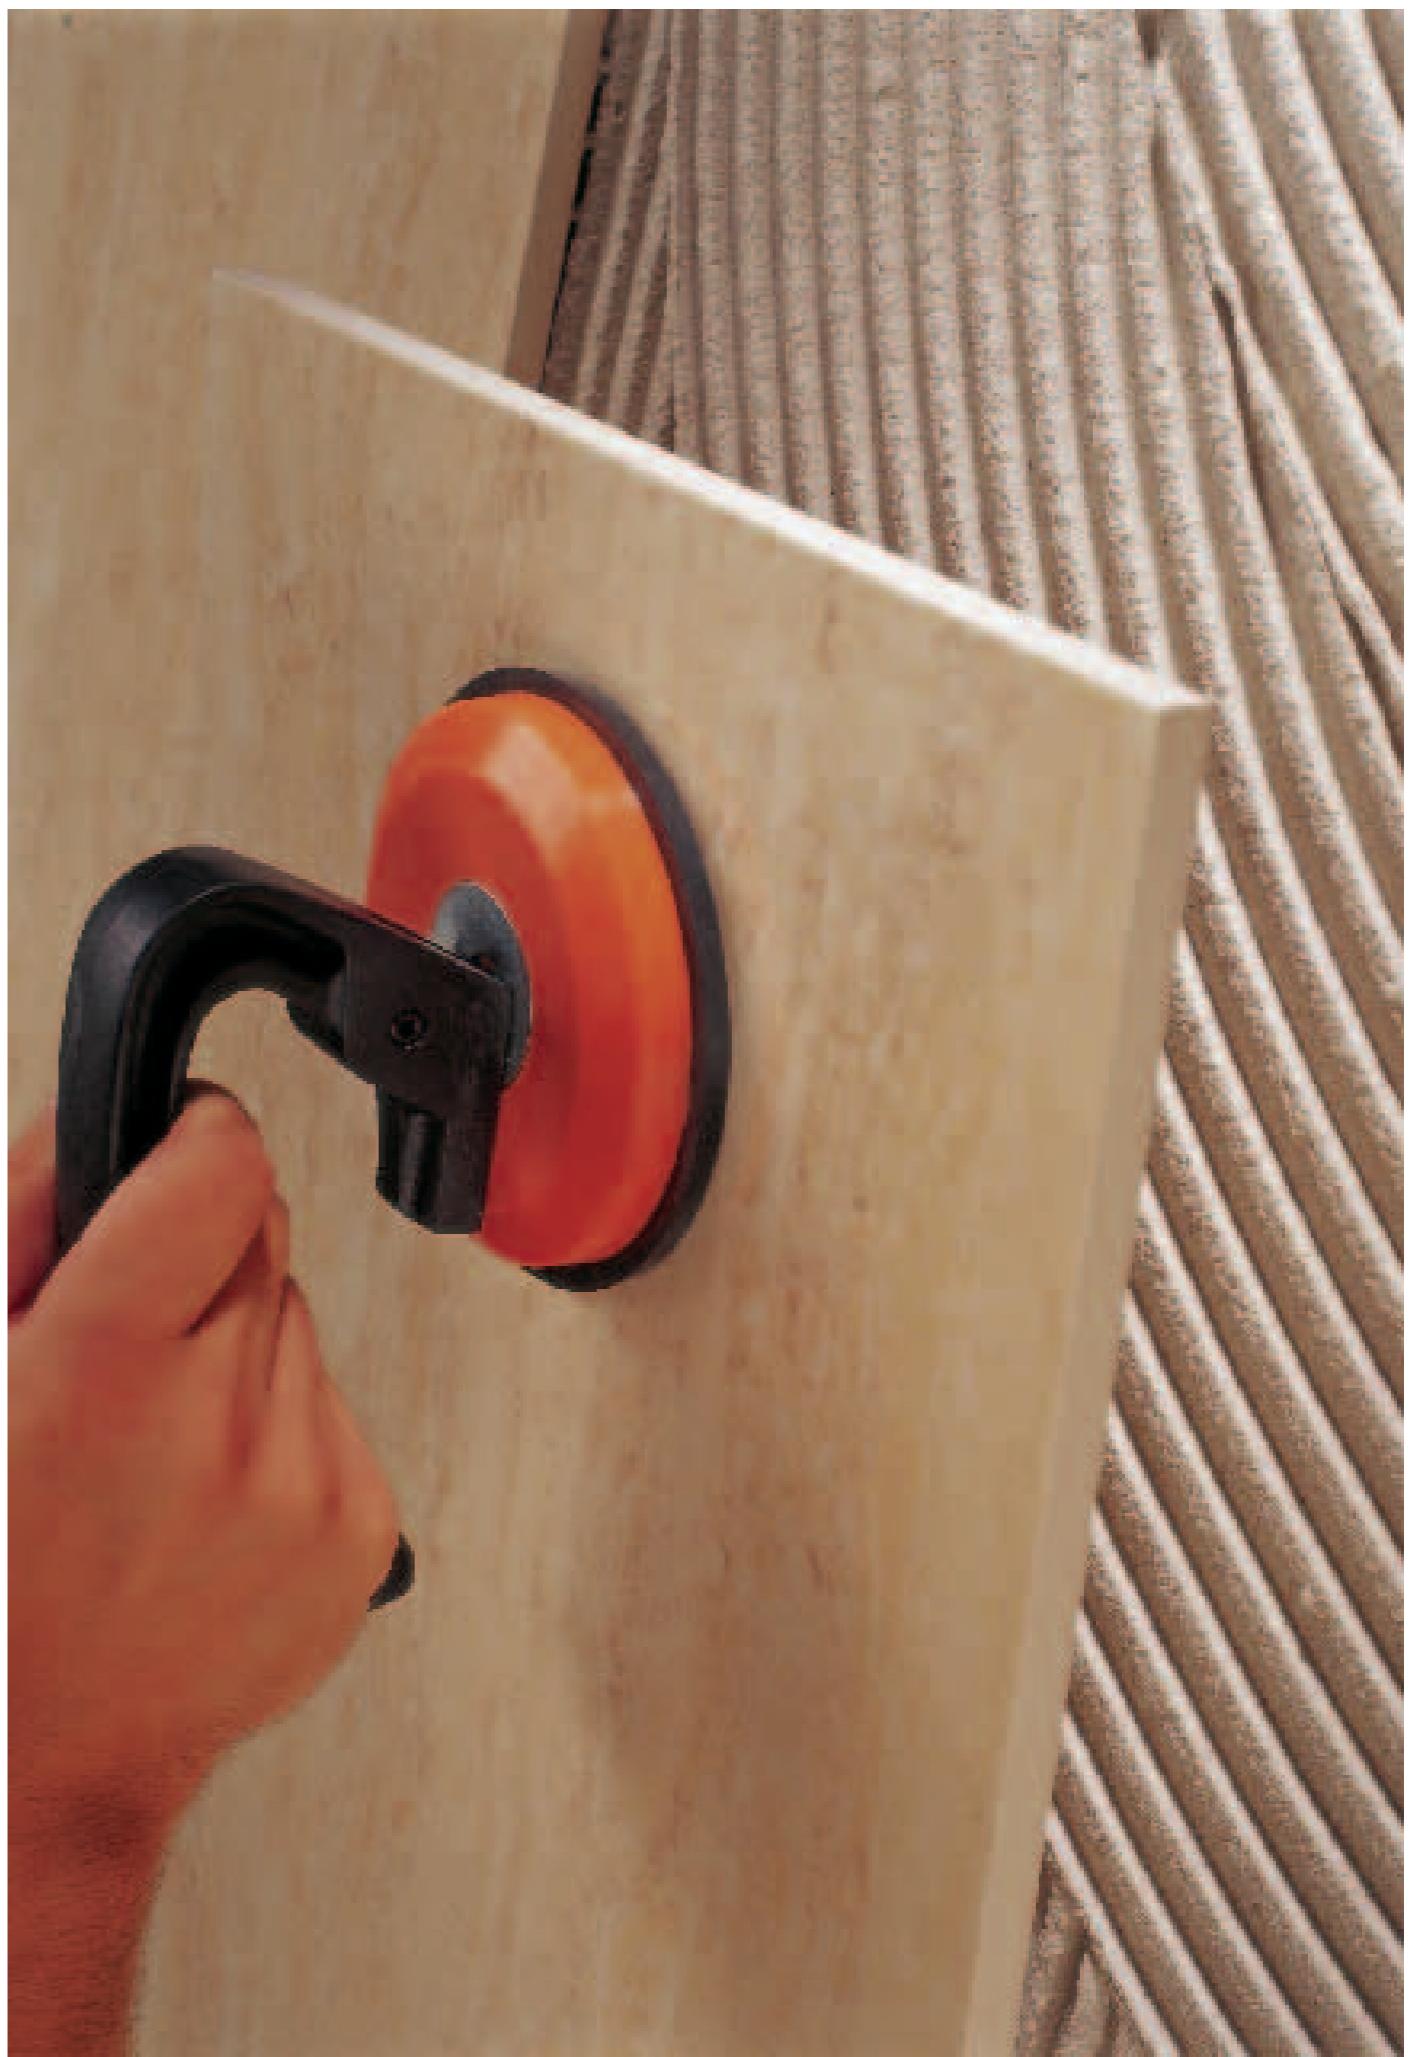

one-flex n

A high-tech single-component adhesive that is easy to apply and suitable for laying all types of ceramic tiles. Specially recommended for porcelain tiles, antiqued marble, large formats and swimming pools. Thixotropic.



cement-based adhesives

one-flex n

one-flex meets the daily needs of professional tile layers, and its outstanding flexibility and bonding strength make it perfect for situations where high performance is required: when tiling over existing tiles or for commercial flooring, floors with built-in underfloor heating, façades and swimming pools. Waterproof and frost resistant.

one-flex has been formulated with cutting-edge technology. It is made of highly resistant cements, graded aggregates and a high ratio of synthetic resins. Thanks to its high-performance properties, it complies with current European standards.

coverage

tile	notched trowel (mm)	consumption
Up to 10x10 cm	U4	1-2 kg/m ²
Up to 20x20 cm	U6	2-3 kg/m ²
Up to 30x30 cm	U8	3-4 kg/m ²
Más de 30x30 cm	U10 (floating and buttering method)	4-5 kg/m ²

presentation

code	product	packaging (kg)	palet (kg)	price
B12903004	one-flex n blanco	25	1000	0,99€
B12904005	one-flex n gris	25	1000	0,92€

uses

Interior and exterior floors and exteriors.
Residential use and public use.
Heavy-traffic floors.
Floors with built-in underfloor heating.
Urban decoration.
Swimming pools.
Exteriors façades.**

applications

substrates:
Cement-lime mortar.

Cement mortars:

- Cement render.
- Cement floor screeds.

Concrete.

Plasterboard.

Existing ceramic tiles.

Plaster or anhydrite substrates.*

*In this case, treat the substrate first with uniprim primer.

** Replace all the water in the mix with unilax additive.

Do not use on wood, PVC, rubber or metal surfaces or those substrates subject to strong movements. In such cases, use politech.

one-flex n SP

A high-tech single-component with dust free technology adhesive that is easy to apply and suitable for laying all types of ceramic tiles. Specially recommended for porcelain tiles, antiqued marble, large formats and swimming pools. Thixotropic.



cement-based adhesives

one-flex n SP

one-flex n SP meets the daily needs of professional tile layers, and its outstanding flexibility and bonding strength make it perfect for situations where high performance is required: when tiling over existing tiles or for commercial flooring, floors with built-in underfloor heating, façades and swimming pools.

Waterproof and frost resistant.

materials

All format tiles.

Absorbent and non-absorbent ceramic tiles:

- Extruded tiles (Groups AlIII, AlII and Al).
- Porous single-fired and double-fired tiles (Group BlIII).
- Stoneware tiles (Groups BlIa and BlB).
- Porcelain tiles (Group BlA).

Glass mosaics.

Natural stone and marble not prone to staining.

applications

substrates:

Cement-lime mortar.

Cement mortars:

- Cement render.
- Cement floor screeds.

Concrete.

Plasterboard.

Existing ceramic tiles.

Plaster or anhydrite substrates.*

*In this case, treat the substrate first with uniprim primer.

** Replace all the water in the mix with unilax additive.

Do not use on wood, PVC, rubber or metal surfaces or those substrates subject to strong movements. In such cases, use politech.



C2 / TE / S1
EN 12004
25 kg.



C2 / TE / S1
EN 12004
25 kg.

coverage

tile	notched trowel (mm)	consumption
Up to 10x10 cm	U4	1-2 kg/m ²
Up to 20x20 cm	U6	2-3 kg/m ²
Up to 30x30 cm	U8	3-4 kg/m ²
Más de 30x30 cm	U10 (floating and buttering method)	4-5 kg/m ²

presentation

code	product	packaging (kg)	palet (kg)	price
B12909013	one-flex n sp blanco	25	1000	1,10€
B12909013	one-flex n sp gris	25	1000	1,02€

uses

Interior and exterior floors and exteriors.
Residential use and public use.
Heavy-traffic floors.
Floors with built-in underfloor heating.
Urban decoration.
Swimming pools.
Exteriors façades.**

rapimax n

A high-performance cement-based adhesive of outstanding flexibility for laying void-free ceramic floors. Specially recommended for porcelain tiles, terracotta and large formats.
For interiors and exteriors.



rapimax n

rapimax is a fluid cement-based adhesive. It stands out for its "self-spreading" effect, ensuring full coverage of the underside of tiles without having to resort to the floating and buttering method. Recommended as a leveller in thicknesses up to 15 mm.

materials

All format tiles.

Absorbent and non-absorbent ceramic tiles:

- Extruded tiles (Groups AIII, All and AI).
- Porous single-fired and double-fired tiles (Group BIII).
- Stoneware tiles (Groups BIIa and BIIb).
- Porcelain tiles (Group Bla).

Terracotta.

applications

substrates:

Cement-based floor screeds.

Cement/lime mortar.

Concrete ejecutado in-situ.

Soleras industrielas.

Existing ceramic tiles.

Solera de anhidrita *


*In this case, treat the substrate first with uniprim primer..

Do not use on wood, PVC, rubber or metal surfaces or those substrates subject to strong movements. In such cases, use politech.

cement-based adhesives

maxifluid

A fluid high-performance adhesive for void-free tiling. Specially recommended for laying porcelain, terracotta and large-format tiles both indoors and out.

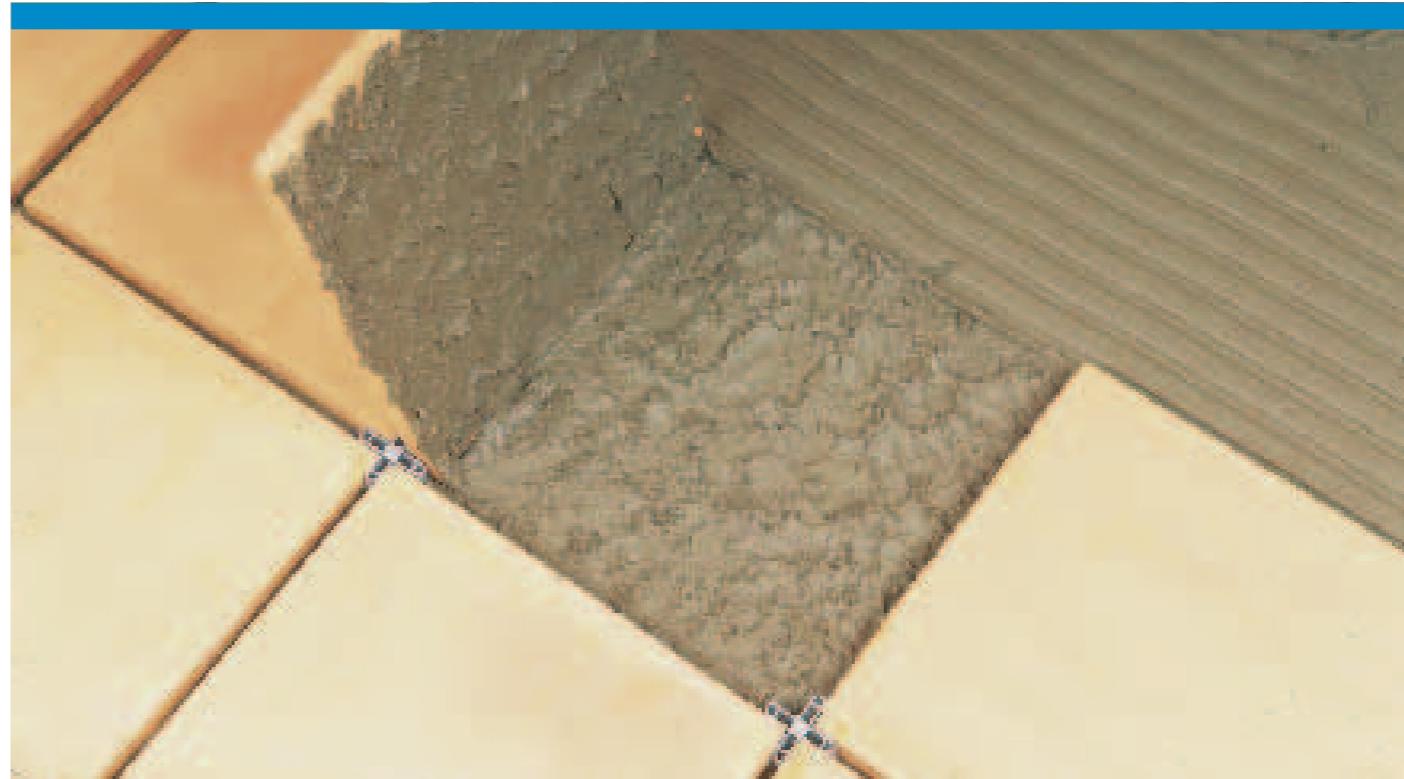

maxifluid

maxifluid is a high-performance cement-based adhesive for laying floor tiles of all kinds, including porcelain tiles. An effective solution thanks to its high versatility and multi-functional use, with a high wettability that helps ensure void-free contact, thus avoiding the need for floating and buttering. Its high deformability makes it ideal for special applications, such as floors with electrical or warm water underfloor heating systems, for use on existing tiles or for large-format tiles. maxifluid is specially

formulated using cutting-edge technology. Made of special cements, graded aggregates, and a high ratio of synthetic resins, it guarantees excellent workability.



coverage

tile	notched trowel (mm)	consumption
Formatos Up to 33x33 cm	U8	3-4 kg/m ²
Formatos Up to 33x33 cm	U10-15	5-6 kg/m ²



presentation

code	product	packaging (kg)	palet (kg)	price
B12905006	rapimax n gris	25	1000	0,87€

uses

- Interior and exterior floors.
- Damp areas.
- Floors with built-in underfloor heating.
- Commercial flooring.
- Industrial flooring.
- Urban decoration.

materials

Small, medium and large-format tiles.

Absorbent and non-absorbent tiles:

- Extruded tiles (Groups AIII, All and AI).
- Vitrified tiles (Groups BIIa and BIIb).
- Porcelain tiles (Group Bla).
- Terracotta tiles.

applications

substrates:

Cement screeds.

Cement/lime mortars.

Concrete poured onsite.

Industrial screeds.

Existing ceramic tiles.

* Electric Radiant Floor Heating.

Do not use on wood, PVC, rubber or metal surfaces or those substrates subject to strong movements. In such cases, use politech.

coverage

tile	notched trowel (mm)	consumption
Formatos Up to 33x33 cm	U8	3-4 kg/m ²
Formatos Up to 33x33 cm	U10-15	5-6 kg/m ²

presentation

code	product	packaging (kg)	palet (kg)	price
B11906008	maxifluid gris	25	1000	0,90€

uses

- Indoor and outdoor floors.
- Environments subject to water or damp.
- Floors with built-in electrical underfloor heating.
- Commercial flooring.
- Industrial flooring.
- Urban décor.

super-one n

A fast-setting high-tech adhesive for laying all types of ceramic tiles. Specially recommended for tile-on-tile overlays. Thixotropic.



cement-based adhesives

materials

super-one guarantees fast setting times for all ceramic tile types and formats, including porcelain tiles. Ready for foot traffic after 3 hours, this adhesive is perfect for ceramic tiles in premises that require good mechanical performance and rapid setting times, such as commercial and industrial flooring and floors with built-in underfloor heating. Waterproof and frost resistant.

coverage

tile	notched trowel (mm)	consumption
Up to 10x10 cm	U4	1-2 kg/m ²
Up to 20x20 cm	U6	2-3 kg/m ²
Up to 30x30 cm	U8	3-4 kg/m ²
Más de 30x30 cm	U10 (floating and buttering method)	4-5 kg/m ²

presentation

code	product	packaging (kg)	palet (kg)	price
B12909010	super-one n blanco	25	1000	1,42€
B12909011	super-one n gris	25	1000	0,97€

uses

Walls and floors.
Interiors and exteriors.
Residential use.
Public venues.
Heavy-traffic floors.
Floors with built-in underfloor heating.
Urban decoration.
Exterior facades.**

applications

substrates:
Cement-lime mortar.

Cement mortars:

- Cement render.
- Cement floor screeds.

Concrete.

Plasterboard.

Existing ceramic tiles.

Plaster or anhydrite substrates.*

*In this case, treat the substrate first with uniprim primer.

** Replace all the water in the mix with unilax additive.

Do not use on wood, PVC, rubber or metal surfaces or those substrates subject to strong movements. In such cases, use politech.

unilax

A synthetic resin-based aqueous dispersion for improving cement-based adhesives. unilax is a special additive that can be added to cement-based adhesives to enhance their bonding strength and flexibility.



aditive cement-based adhesives

unilax replaces any water in the mix, creating an easy-to-spread, easy-to-use paste.

5l./20l.



unilax

unilax greatly improves the adhesive's overall flexibility, allowing it to absorb contractions or expansions produced by temperature changes or moisture in demanding conditions. When laying large-format tiles and natural stone on exterior facades, it is highly recommendable to use unilax with one-flex, fr-one and super-one.

materials

All format tiles.
Absorbent and non-absorbent ceramic tiles:
- Extruded tiles (Groups AlII, AlI and Al).
- Porous single-fired and double-fired tiles (Group BlII).
- Stoneware tiles (Groups BlIa and BlB).
- Porcelain tiles (Group BlA).
Natural stone and marble not prone to staining.

applications

substrates:
Cement-lime mortar.
Cement mortars:
- Cement render.
- Cement floor screeds.
Concrete.
Plasterboard.
Existing ceramic tiles.
Plaster or anhydrite substrates.*

*In this case, treat the substrate first with uniprim primer.

coverage
Replaces any water in the mix indicated on the container.

presentation

code	product	packaging (kg)	palet (kg)	price
B51601002	unilax 20 l.	20	560	3,64€
B51602002	unilax 5 l.	4x5	480	4,16€

uses

Interior and exterior floors where good mechanical performance is required.
Claddings on exterior facades.
Terraces.
Residential use.
Public venues.
Heavy-traffic floors.
Floors with built-in underfloor heating.
Urban decoration.
Swimming pools.

fonolax

fonolax is an additive of synthetic resins in aqueous dispersion. It replaces the water in the mix. Ideally suited for mixing with one-flex, super-one or fr-flex cement-based adhesives in those cases when increased flexibility and bonding strength are required.



fonolax

With its high degree of flexibility, fonolax is an ideal additive to be mixed with cement-based adhesives in order to absorb the contractions/expansions caused by interior ambient temperature changes.

materials

All format tiles.
Absorbent and non-absorbent ceramic tiles:
- Extruded tiles (Groups AlII, AlI and Al).
- Porous single-fired and double-fired tiles (Group BlII).
- Stoneware tiles (Groups BlIa and Blb).
- Porcelain tiles (Group Bla).
Natural stone and marble not prone to staining.

applications

substrates:
Cement-lime mortar.
Cement mortars:
Cement render.
Cement floor screeds.
Concrete.
Plasterboard panels.
Existing ceramic tiles.
Plaster or anhydrite substrates.*

*In this case, treat the substrate first with uniprim primer.

aditivos cement-based adhesives

super-an

A fast-setting liquid adhesive made of calcium sulphate for laying ceramic tiles on anhydrite substrates. Suitable for large formats and interior floors.



super-an

super-an is recommended for laying ceramic tiles or similar coverings on anhydrite substrates that have not been previously treated with a primer. Thanks to its fluidity, large format tiles (up to 3600 cm²) can be laid without having to resort to the floating and buttering method. Suitable for use as a leveller for thicknesses up to 10 mm.

materials

All format tiles.
Absorbent and non-absorbent ceramic tiles:
- Extruded tiles (Groups AlII, AlI and Al).
- Porous single-fired and double-fired tiles (Group BlII).
- Stoneware tiles (Groups BlIa and Blb).
- Porcelain tiles (Group Bla).
Natural stone and marble not prone to staining.

applications

substrates:
Anhydrite screeds.

Do not use on vertical, metal, plastic or wood surfaces or those substrates subject to strong movements. In such cases, use politech.

uses

Interior floors
Floors with built-in underfloor heating (agua).
Commercial flooring

adhesivos base yeso



25 kg.



coverage

tile	notched trowel (mm)	consumption
Formatos Up to 33x33 cm	U8 - U9	3-4 kg/m ²
Formatos Up to 33x33 cm	U15-20	5-6 kg/m ²

presentation

code	product	packaging (kg)	palet (kg)	price
B16901001	super-an	25	1225	1,04€

coverage

Replaces any water in the mix indicated on the container.



5 l. / 20 l.

presentation

code	product	packaging (kg)	palet (kg)	price
B52502001	fonolax 20	20	560	2,18€
B52602001	fonolax 5	4x5	480	1,71€

uses

Soundproof sheeting: fonomix 15/40.
Floors with built-in underfloor heating.
Large tile formats on plasterboard substrates..

bt-1000 n

A flexible ready-to-use adhesive paste. Suitable for laying all types of ceramic tiles on interior walls. Thixotropic.



dispersion adhesives

bt-3000 n

A flexible ready-to-use adhesive paste. Suitable for laying all types of ceramic tiles on interior walls. Thixotropic.



dispersion adhesives

bt-1000 n

bt-1000 is suitable for laying small and medium-format ceramic tiles of all kinds on common building substrates. Highly recommended for plaster substrates and wooden panels. With bt-1000, the spot bonding method can be used to lay styrofoam, cellular polyurethane and/or rock wool insulation panels.

materials

Small and medium-format tiles.

Absorbent and non-absorbent ceramic tiles:

Porous single-fired and double-fired tiles (Group BIII).

- Stoneware tiles (Group Bla).

- Porcelain tiles (Group Bla).

Insulation panels:

- Styrofoam panels.

- Polyurethane panels.

- Rock wool panels.

coverage

tile	notched trowel (mm)	consumption
Formatos Up to 20x20 cm	U4	1-2 kg/m ²
Formatos mayores 33x33 cm	U6	2-3 kg/m ²

presentation

code	product	packaging (kg)	palet (kg)	price
B13901001	bt-1000 n	25	600	1,40€

applications

substrates:

Plaster.

Plasterboard.

Wooden panels.

Fibre cement.

Cement render.

Cement-lime mortars.

Cellular concrete.

Do not use on floors or for marble or natural stone Do not use on PVC, rubber or metal surfaces or those substrates subject to strong movements.

In such cases, use politech.

Do not lay non-absorbent ceramic tiles on non-absorbent substrates.

No colocar cerámica de baja pgoldsidad sobre SUBSTRATES sin absorción.

uses

Interior walls.

Interior ceilings.

Dry areas.

Residential use.



D1 / T
EN 12004
25 kg.



bt-3000 n

bt-3000 is suitable for laying small and medium-format ceramic tiles of all kinds on common building substrates. Highly recommended for plaster substrates and wooden panels. With bt-3000, the spot bonding method can be used to lay styrofoam, cellular polyurethane and/or rock wool insulation panels.

materials

Small and medium-format tiles.

Absorbent and non-absorbent ceramic tiles:

Porous single-fired and double-fired tiles (Group BIII).

- Stoneware tiles (Group Bla).

- Porcelain tiles (Group Bla).

Insulation panels:

- Styrofoam panels.

- Polyurethane panels.

- Rock wool panels.

applications

substrates:

Plaster.

Plasterboard.

Wooden panels.

Fibre cement.

Cement render.

Cement-lime mortars.

Cellular concrete.

Existing ceramic tiles.

Do not use on floors or with marble or natural stone.

Do not use on wood, PVC, rubber or metal surfaces or those substrates subject to strong movements. In such cases, use politech.

Do not lay non-absorbent ceramic tiles on non-absorbent substrates.

coverage

tile	notched trowel (mm)	consumption
Formatos Up to 20x20 cm	U4	1-2 kg/m ²
Formatos mayores 33x33 cm	U6	2-3 kg/m ²

presentation

code	product	packaging (kg)	palet (kg)	price
B13903003	bt-3000 n	25	600	1,56€

uses

Interior walls.

Interior ceilings.

Damp areas.

Residential use.



D2 / TE
EN 12004
25 kg.



A high-tech two-component polyurethane adhesive with high-performance properties. Suitable for laying ceramic tiles of all kinds on deformable substrates. For interiors and exteriors.

**politech**

politech can be used to lay all kinds of ceramic tiles and natural stone in situations when they are exposed to extreme conditions. Given its outstanding technical characteristics, it can be used on wood, metal, PVC and rubber. Waterproof and frost resistant.

politech has a polyurethane base (component A) and a specific hardener (component B). Hardening occurs by means of a chemical reaction, creating an elastic film that is completely waterproof.

materials

All format tiles.
Absorbent and non-absorbent ceramic tiles:

- Porous single-fired and double-fired tiles (Group BIII).

- Stoneware tiles (Groups Bla and Blb).

- Porcelain tiles (Group Bla).

Glass mosaics.

Terracotta.

Marble and natural stone.

Conglomerate marble.

applications

substrates:

Common cement substrates.

Prefabricated concrete.

Concrete cast on-site.

Plaster and anhydrite.

Plasterboard.

Existing ceramic tiles.

Polyester.

Metal.

PVC.

Wooden floors and walls.

Rubber.

coverage

tile	notched trowel (mm)	consumption
Mosaics pequeño formato	V3	2 kg/m ²
Formatos Up to 33x33 cm	U6	3 kg/m ²
Formatos mayores 33x33 cm	U8	4 kg/m ²

presentation

code	product	packaging (kg)	palet (kg)	price
B41061001	politech blanco	10	360	7,26€

uses


Interior and exterior walls and floors.
Floors with built-in underfloor heating.
Damp areas.
Cold-storage chambers.
Swimming pools.
Exteriors façades.



R2/T
EN 12004
0,6 kg. (botella)
9,4 (bote)

**colorstuk 0-4**

A high-tech coloured mortar for grouting tile joints up to 4 mm. Specially recommended for rectified ceramic tiles.

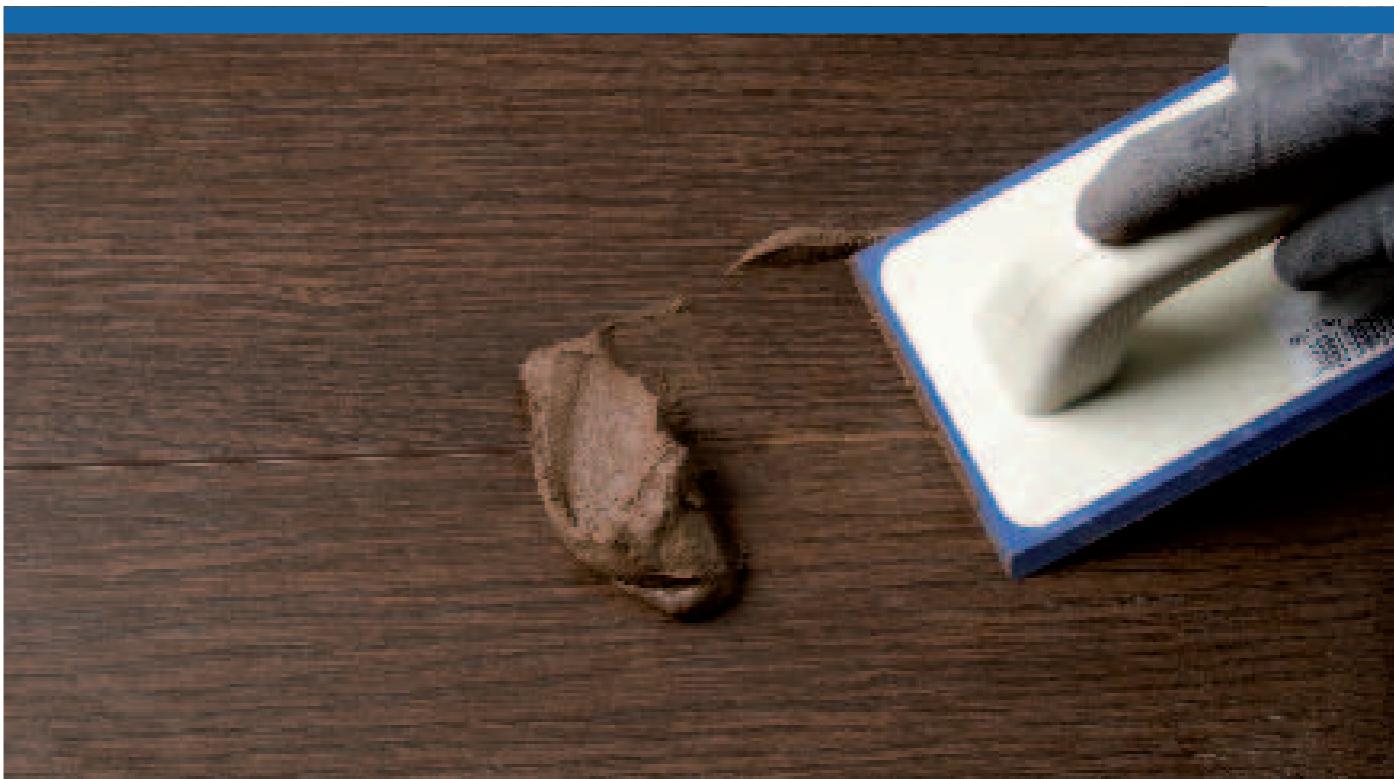**colorstuk 0-4**

colorstuk 0-4 is the ideal high-tech mortar for grouting joints up to 4 mm, whatever the type of ceramic tile, both indoors and out. It is easy to use, resistant and colour fast, guaranteeing an ultra-fine finish with rectified materials and layouts with minimum width joints. Resistant to damp, frost and ultraviolet rays.

materials

Absorbent and non-absorbent ceramic tiles:

- Extruded tiles (Groups AllI, All and Al).

- Porous single-fired and double-fired tiles (Group BIII).

- Stoneware tiles (Groups Bla and Blb).

- Porcelain tiles (Group Bla).

Glass mosaics.

Antiqued marble.

Natural stone.

When used in situations with permanent damp or subject to strong deformation, replace the water in the mix with cl-stuk.

For tiles with surface absorption, apply a protective treatment beforehand.

uses

Interior and exterior floors and exteriors.
Residential use.
Public venues.
Heavy-traffic floors.
Swimming pools.

colorstuk 0-4 is made of aggregates, highly resistant cements, pigments and specific additives. It stands out for its workability and the ease with which it can be cleaned. Sold in a top-quality, attractive packaging material, it is a pioneer in meeting current market needs.

CG2
EN 13888
5kg./25 kg.

**coverage**


tile	consumption (gr/m ² mm of joint)
mosaic 2x2	600
5x5 cm	400
10x10 cm	200
20x20 cm	140
20x30 cm	100
30x30 cm	85
40x40 cm	65
30x60 cm	50

presentation

colour	code	product	packaging (kg.)	euro palet (kg.)	price
blanco	B21501001 / B21901001	colorstuk 0-4 blanco	4 x 5 / 25	400 / 1000	1,27 € / 1,19 €
manhattan	B21502002 / B21902002	colorstuk 0-4 manhattan	4 x 5 / 25	400 / 1000	1,56 € / 1,14 €
bahama	B21502003	colorstuk 0-4 bahama	4 x 5	400	1,56 €
cemento	B21502004	colorstuk 0-4 cemento	4 x 5	400	1,56 €
antracita	B21502005	colorstuk 0-4 antracita	4 x 5	400	1,56 €
negro	B21502006	colorstuk 0-4 negro	4 x 5	400	1,56 €
marfil	B21502009	colorstuk 0-4 marfil	4 x 5	400	1,56 €
marrón	B21502010	colorstuk 0-4 marrón	4 x 5	400	1,56 €
beige	B21502016	colorstuk 0-4 beige	4 x 5	400	1,56 €
caramelo	B21522218	colorstuk 0-4 caramelo	4 x 5	400	1,50 €
moka	B21522217	colorstuk 0-4 moka	4 x 5	400	1,50 €
gris	B21522219	colorstuk 0-4 gris	4 x 5	400	1,54 €

colorstuk 2-12

A high-tech coloured mortar for grouting joints from 2 to 12 mm. Suitable for all types of ceramic tiles and for natural stone. For interiors and exteriors.

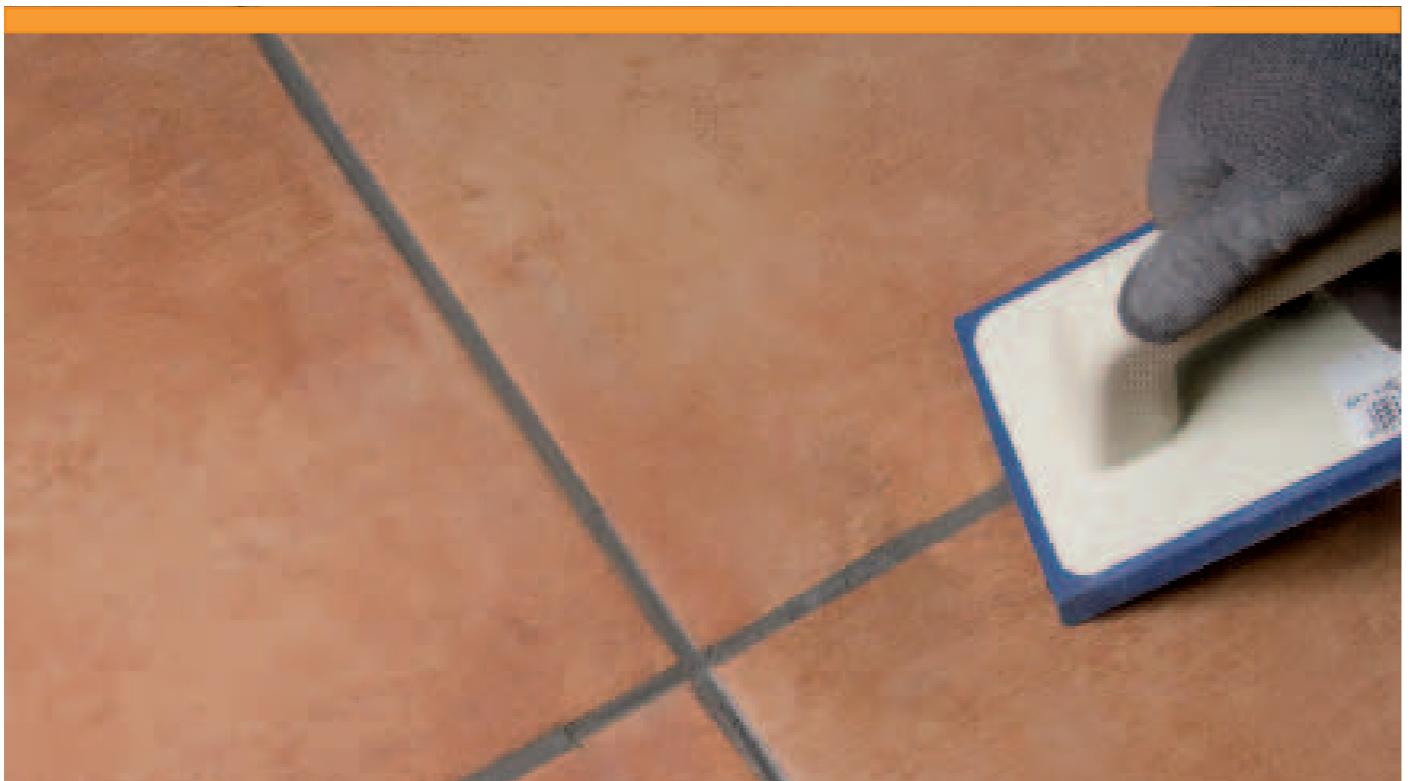

colorstuk 2-12

colorstuk 2-12 is a simple, effective solution for grouting tile joints. Its high-tech formula, made of graded aggregates, highly resistant cements, synthetic resins and specific additives, ensures outstanding performance. Easy to use, easy to clean and a prime choice for more demanding tile layers.

materials

Absorbent and non-absorbent ceramic tiles:

- Extruded tiles (Groups AIII, AI and Al).
- Porous single-fired and double-fired tiles (Group BIII).
- Stoneware tiles (Groups BIIa and BIIb).
- Porcelain tiles (Group Bla).

Glass mosaics.

Antiqued marble.

Natural stone.

When used in situations with permanent damp or subject to strong deformation, replace the water in the mix with cl-stuk.

For tiles with surface absorption, apply a protective treatment beforehand.

uses

Pavimentos and revestimientos interiores and exteriores.

Uso residencial.

Locales de pública concurrencia.

Pavimentos de alto tránsito.

Fachadas exteriores.

Piscinas.

Terrazas exteriores.

Available in different colours and sold in a top-quality, attractive packaging material, it is a pioneer in meeting current market needs.

coverage

tile	consumption (gr/m ² mm of joint)
20x20 cm	140
20x30 cm	100
30x30 cm	85
40x40 cm	65
30x60 cm	50

presentation


colour	code	product	packaging (kg.)	euro palet (kg.)	price
blanco	B21521001	colorstuk 2-12 blanco	4 x 5	400	1,30 €
manhattan	B21522002 / B21922002	colorstuk 2-12 manhattan	4 x 5 / 25	400 / 1000	1,63 € / 1,21 €
bahama	B21522003	colorstuk 2-12 bahama	4 x 5	400	1,63 €
cemento	B21522004 / B21922004	colorstuk 2-12 cemento	4 x 5 / 25	400 / 1000	1,63 € / 1,21 €
antracita	B21522005 / B21922005	colorstuk 2-12 antracita	4 x 5 / 25	400 / 1000	1,63 € / 1,21 €
negro	B21522006 / B21922006	colorstuk 2-12 negro	4 x 5 / 25	400 / 1000	1,63 € / 1,21 €
marfil	B21522009	colorstuk 2-12 marfil	4 x 5	400	1,63 €
marrón	B21522222	colorstuk 2-12 marrón	4 x 5	400	1,48 €
beige	B21522016	colorstuk 2-12 beige	4 x 5	400	1,63 €
caramelo	B21522221	colorstuk 2-12 caramelo	4 x 5	400	1,54 €
moka	B21522223	colorstuk 2-12 moka	4 x 5	400	1,54 €
gris	B21522224	colorstuk 2-12 gris	4 x 5	400	1,54 €



high-tech cement-based mortars

colorstuk rapid n

A high-tech coloured mortar with fast setting and hardening times for grouting joints from 2 to 15 mm. Suitable for all types of ceramic tiles and for natural stone. colorstuk rapid n is a simple, effective solution for grouting tile joints from 2 to 15 mm. It is easy to use, resistant and colour fast.

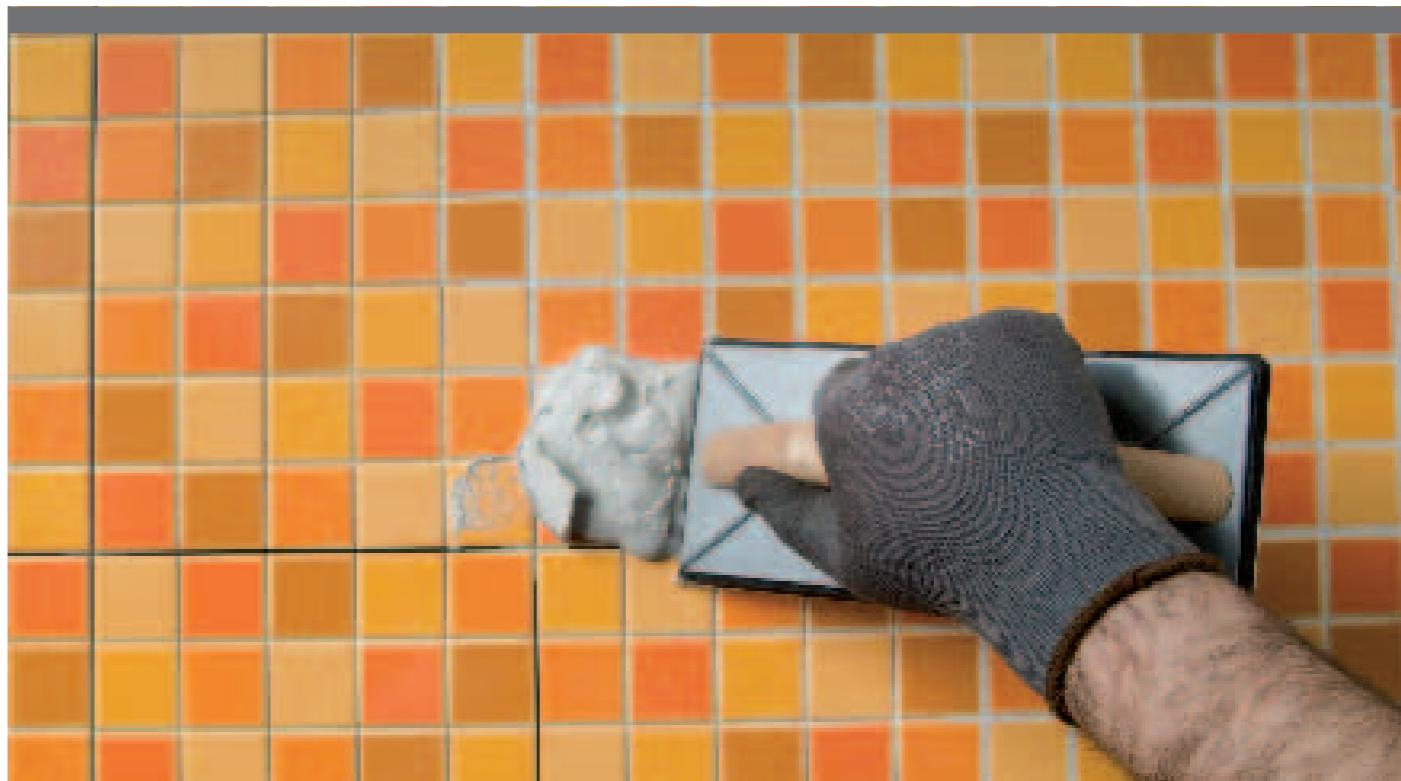

colorstuk rapid n

Its rapid setting time prevents the appearance of efflorescence and variations in shade, ensuring joints with a homogeneous, even finish. Its high waterproof protection and resistance to mould makes it ideal for use outdoors or in environments subject to constant damp.

materials

Absorbent and non-absorbent ceramic tiles:

- Extruded tiles (Groups AIII, AI and Al).
- Porous single-fired and double-fired tiles (Group BIII).
- Stoneware tiles (Groups BIIa and BIIb).
- Porcelain tiles (Group Bla).

Glass mosaics.

Antiqued marble.

Natural stone.

For tiles with surface absorption, apply a protective treatment beforehand.

uses

Interior and exterior walls and floors.

Residential use.

Public venues.

Heavy-traffic floors.

Exterior facades.

Swimming pools.

Terraces exteriors.

colorstuk rapid n is made of specific hydraulic binding materials, graded aggregates and special additives, guaranteeing fast full cure times, excellent mechanical resistance and low water absorption, providing long lasting grouting in all situations.

coverage

tile	consumption (gr/m ² mm of joint)
mosaic 2x2	700
20x20 cm	120
30x30 cm	85
40x40 cm	70
30x60 cm	75
Terracota 15x30 cm	300

presentation

colour	code	product	packaging (kg.)	euro palet (kg.)	price
blanco	B22501001	colorstuk rapid n blanco	5	400	2,56 €
manhattan	B22502002	colorstuk rapid n manhattan	5	400	2,14 €
bahama	B22502003	colorstuk rapid n bahama	5	400	2,75 €
cemento	B22502004	colorstuk rapid n cemento	5	400	2,14 €
antracita	B22502005	colorstuk rapid n antracita	5	400	2,14 €
negro	B22502006 / B22902006	colorstuk rapid n negro	5 / 25	400 / 1000	2,62 € / 2,31 €
marfil	B22502009	colorstuk rapid n marfil	5	400	2,75 €
marrón	B22502010	colorstuk rapid n marrón	5	400	2,62 €
beige	B22502016	colorstuk rapid n beige	5	400	2,75 €
caramelo	B22502007	colorstuk rapid n caramel	5	400	2,62 €
moka	B21522220	colorstuk rapid n moka	5	400	2,52 €
gris	B22502013	colorstuk rapid n gris	5	400	2,62 €
terracota	B22502008	colorstuk rapid n terracota	5	400	2,62 €
tabaco	B22502011	colorstuk rapid n tabaco	5	400	3,92 €



colorstuk especial n

high-tech cement-based mortars

colorstuk especial is the ideal high-performance mortar for grouting tile joints of up to 8 mm on any kind of tiled surface, whether indoors or out.



colorstuk especial

Resistant and easy to use, it ensures colourfast tile joints, guaranteeing a perfect finish when used with rectified tiles or minimum joint widths. Resistant to damp, frost and ice and ultra-violet rays.

colorstuk especial is made of aggregates with a controlled grain size distribution, highly resistant cements, pigments and special additives. Thanks to its finely ground grain size, it easily penetrates tile joints of a minimum width.

materials

Absorbent and non-absorbent ceramic tiles:

- Extruded tiles (Groups AIII, AI and Al).
- Porous single-fired and double-fired tiles (Group BIII).
- Stoneware tiles (Groups BIIa and BIIb).
- Porcelain tiles (Group Bla).

Glass mosaics.

Antiqued marble.

Natural stone.

coverage

tile	consumption (gr/m ² mm of joint)
Mosaic 2x2 cm 1000	
5x5 cm	600
20x30 cm	185
30x100 cm	125

presentation

color	code	product	packaging (kg.)	euro palet (kg.)	price
acid	B24302045	colorstuk especial acid	8 x 2	480	5,80 €
brown	B24302048	colorstuk especial brown	8 x 2	480	7,00 €
cherry	B24302049	colorstuk especial cherry	8 x 2	480	22,00 €
dark	B24302043	colorstuk especial dark	8 x 2	480	8,50 €
moka	B24302047	colorstuk especial moka	8 x 2	480	5,80 €
orange	B24302030	colorstuk especial orange	8 x 2	480	12,00 €
vanilla	B24302044	colorstuk especial vanilla	8 x 2	480	5,80 €
white	B24302046	colorstuk especial white	8 x 2	480	5,80 €
nacaré	B24302042	colorstuk especial nacaré	8 x 2	480	5,80 €

When used in situations with permanent damp or subject to strong deformation, replace the water in the mix with cl-stuk.

For tiles with surface absorption, apply a protective treatment beforehand.

uses

Interior and exterior walls and floors.

Residential use.

Public venues.

Heavy-traffic floors.

Exterior facades.

Swimming pools.

Terraces exteriors.

cl-stuk

A latex additive that can be mixed with the colorstuk range of high-tech grout mortars in cases when increased mechanical resistance, reduced water absorption or improved flexibility is required.



cl-stuk

cl-stuk is a synthetic resin additive in an aqueous dispersion that fully replaces any water in the mix, upgrading the mortar's mechanical properties, ensuring a high degree of flexibility and reduced water absorption.

materials

Absorbent and non-absorbent ceramic tiles:

- Extruded tiles (Groups AIII, AI and Al).
- Porous single-fired and double-fired tiles (Group BIII).
- Stoneware tiles (Groups BIIa and BIIb).
- Porcelain tiles (Group Bla).

Glass mosaics.

Antiqued marble.

Natural stone.

For tiles with surface absorption, apply a protective treatment beforehand.

uses

Interior and exterior floors and exteriors.

Residential use.

Public venues.

Heavy-traffic floors.

Floors with built-in underfloor heating.

Exterior facades.

Terraces.

Swimming pools.

aditivo para material de rejuntado

2l / 5l



It is mainly intended for areas that require more resistant tile joints, such as floors exposed to heavy traffic, ceramic tiles that are power-cleaned or surfaces in permanent contact with water. It increases the flexibility of the joint, making it ideal for deformable substrates such as wooden panels. Specially recommended for rectified tiles with minimal joint widths.

coverage

consumption:
Replace any water in the mix indicated on the container with cl-stuk.

presentation

code	product	packaging (kg)	palet (kg)	price
B51201001	cl-stuk 2l.	8x2	448	3,12€
B51501001	cl-stuk 5l.	4x5	480	2,44€

epotech

A high-performance two-component epoxy putty for grouting tile joints that require a high degree of chemical resistance. Recommended for floors exposed to heavy traffic. For interiors and exteriors.



high-tech cement-based mortars

epotech aqua

High-performance two-component epoxy putty for grouting the joints and easy cleaning. Recommended for ceramic and glass mosaic floors and stoneware tiles.



high-tech cement-based mortars

epotech

epotech is suitable for grouting tile joints between 3 and 15 mm on tiled walls and floors subject to chemical attack, such as in dairies, tanneries, paper mills, industrial kitchens, laboratories etc. Specially recommended for floors subject to heavy traffic, industrial warehouses, shopping centres etc. Resistant to water, frost and ice.

epotech is a two-component product made of silica sand and specific additives, making it quick and easy to use. It stands out for its good working and clean up times.

RG
EN 13888
0,3 kg. / 4,7 kg.



coverage

tile	consumption (gr/m ² mm of joint)
Mosaic 2x2 cm 700	
Mosaic 5x5 cm 400	
10x10 cm	200
20x20 cm	140
30x30 cm	85
40x40 cm	75
40x60 cm	70
12,5x24x13 cm	250
12,5x24x18 cm	350

presentation

code	product	packaging (kg)	palet (kg)	price
B42562001	epotech blanco	5	375	7,04€
B42562002	epotech manhattan	5	375	6,42€
B42562005	epotech antracita	5	375	6,42€
B42562009	epotech marfil	5	375	6,42€

materials

Small and medium-format tiles.

Absorbent and non-absorbent ceramic tiles:

- Extruded tiles de absorción media and alta (Groups AllI, All and Al).
- Porous single-fired and double-fired tiles (Group BlII).
- Stoneware tiles (Groups BlIa and BlB).
- Porcelain tiles (Group Bla).

If the tiles have a rough surface texture, perform a cleaning test beforehand.

uses

Food processing industries:

Dairies, cheese-makers, abattoirs, breweries, wineries, canning plants, hospital and hotel kitchens etc...

Industrial floors:

Galvanising plants, tanneries, paper mills, battery rooms etc.

Other applications:

Laboratory worktops, surgeries, mechanical workshops, counters, butcher's shops, kitchen countertops etc.

epotech aqua

epotech aqua is suitable for grouting the tile joints between 0 and 10 mm on tiled walls and floors, both indoors and outdoors. Recommended for residential, industrial and commercial use.

High chemical attack resistance. It is suitable for swimming pools, spas.

Recommended for all kind of absorption ceramic tiles and shape, klinker, natural stones, ceramic and glass mosaics.

Epotech aqua is a high-performance two-component epoxy putty made of silica sand and specific additives, making it swift and easy to clean, presenting outstanding mechanical and chemical properties.

1,2 kg. / 2,4 kg.



propiedades

Hypoallergenic
Two-component.
Acids and alkalis resistance.
Excellent cleaning.
Easy to use.
High resistance to sunlight.
Excellent compression resistance.
Water and frost resistance.
Product without solvents and plastic.
Easy to maintain.
Uniform colour.

application characteristics

mixture proportion: comp. A 2,4 kg + comp. B 1,2 kg
specific weight of the mixture: 1,59 kg/l
application temperature: min = +10°C max= +30°C
mixture duration: 50 min
viscosity: 83200m Pas
setting time: approx. 6 hours.
waiting time after the application: look up the application material technical data.
mortar 14 days
use: 24 h

presentation

code	product	price	colour
B42562016	antracita 3,6 kg	13,53€	
B42562017	beige 3,6 kg	13,53€	
B42562018	cherry 3,6 kg	13,74€	
B42562019	gris 3,6 kg	17,01€	
B42562020	blanco 3,6 kg	13,53€	

s-107n

s-107 n is a high-performance neutral cure elastic sealant.

elastic joint sealant



s-107

s-107 n is a high-performance cure elastic sealant.

elastic joint sealant



s-107n

Its neutral formulation and superior flexibility make it ideal for filling expansion joints and sealing PVC.

300 ml

**recommended as sealant for:**

- For indoor and outdoor use.
- Its neutral cure formula and superior flexibility make it ideal for sealing:
 - Expansion joints
 - Transitions between doors and windows and building components-
 - PVC materials
 - Prefabricated concrete elements

coverage

Approximate no. of linear metres per cartridge

$$\text{Coverage} = \frac{300}{\text{Width (mm)} \times \text{Depth(mm)}}$$

presentation

code	product	packaging (kg)	palet (kg)	price
B82302001	s-107 n banco	25x300	64 cajas	3,97€
B51501001	s-107 n transparente	25x300	64 cajas	3,97€
B51501001	s-107 n gris	25x300	64 cajas	3,97€
B51501001	s-107 n negro	25x300	64 cajas	3,97€

s-107

s-107, provides excellent protection against the build-up of fungi and bacteria, which makes it particularly indicated for grouting in damp areas.

300 ml

**recommended as sealant for:**

- Interiors and exteriors.
- Tile joints, and for kitchens, sanitaryware, baths and showers, and glass.
- Windows and doors.

coverage

Approximate no. of linear metres per cartridge

$$\text{Coverage} = \frac{300}{\text{Width (mm)} \times \text{Depth(mm)}}$$

presentation

code	product	packaging (kg)	palet (kg)	price
B82301004	s-107 banco	25x300	64 cajas	2,61€
B82301005	s-107 transparente	25x300	64 cajas	2,61€
B82301006	s-107 gris	25x300	64 cajas	2,61€


p-404

p-404 is a single-component polyurethane sealant/adhesive putty.

It polymerises when exposed to environmental humidity, forming a highly flexible elastomer with a high bonding strength.

**elastic joint sealant****s-502**

s-502 is a single-component acetic-cure silicone sealant that forms a highly flexible elastomer of outstanding mechanical performance when exposed to environmental humidity.

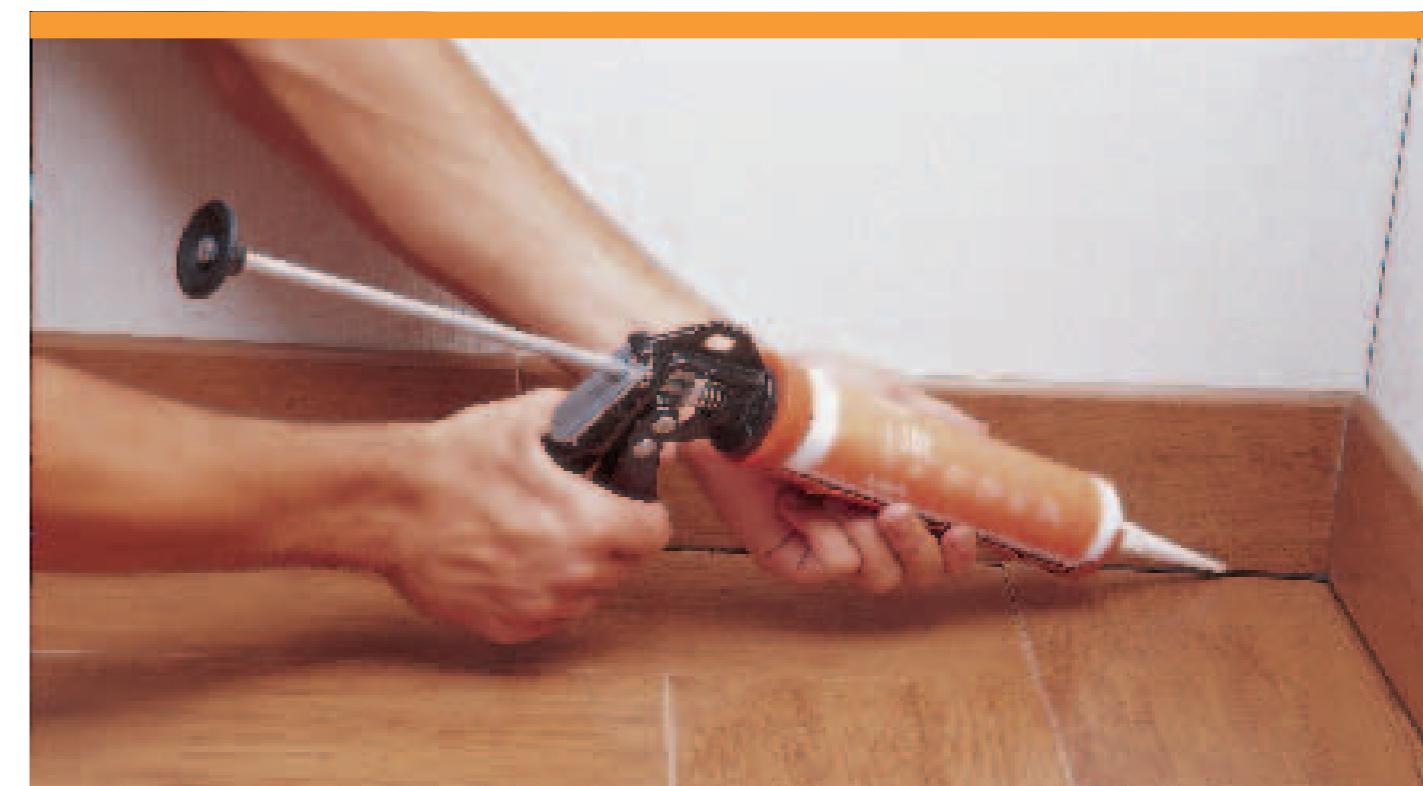**elastic joint sealant****p-404**

Specially recommended for sealing expansion joints in tiled walls and floors. Very resistant to abrasion and atmospheric agents.

p-404 can be painted on.

recommended as sealant for:

Recommended as a sealant for expansion joints on tiled walls and floors. Suitable as an adhesive for bonding commonly used building materials: ceramic tiles, concrete, roof tiles, wood, aluminium, polyester, PVC etc.

coverage

Approximate no. of linear metres per cartridge

$$\text{Coverage} = \frac{310}{(\text{mtr. lineales} \times \text{cartridge}) \quad \text{Width (mm)} \times \text{Depth(mm)}}$$

presentation

code	product	packaging (kg)	palet (kg)	price
B82401001	p-404 blanco	25x310	48 cajas	6,20€
B82401002	p-404 gris	25x310	48 cajas	6,20€
B82401003	p-404 negro	25x310	48 cajas	6,20€

310 ml

**s-502**

Its fungicidal properties make it highly resistant to mildew and bacteria, and it is specially recommended for sealing joints in damp areas.

Highly resistant to atmospheric agents and to ultraviolet rays. It creates a very firm bond on substrates with little absorbency, such as ceramic tiles, glass or metal.

310 ml

**recommended as sealant for:**

Expansion joints in tiled surfaces. Tile joints, and for kitchens, sanitaryware, baths and showers, and glass. Windows and doors. Aquariums. Water conduits and air ducts. Cars, caravans, boats etc.

coverage

Approximate no. of linear metres per cartridge

$$\text{Coverage} = \frac{310}{(\text{mtr. lineales} \times \text{cartridge}) \quad \text{Width (mm)} \times \text{Depth(mm)}}$$

presentation

code	product	packaging (kg)	palet (kg)	price
B82301001	s-502 banco	24x310	64 cajas	7,11€
B82301002	s-502 transparente	24x310	64 cajas	6,47€
B82301003	s-502 gris	24x310	64 cajas	7,11€

level1 n

A fast-setting self-levelling mortar suitable for levelling and evening indoor floor substrates of all kinds. For thicknesses of between 2 and 10mm.



self-levelling mortar

uniprim

A water-base primer made of synthetic resins for the insulation of plaster, anhydrite and moulding plaster substrates. It reduces water absorption and improves the consistency of cement-based substrates. Specially recommended as a primer before pouring on self-levelling mortars.



substrate preparation products

level1 n

level 1 is formulated with special cements, selected aggregates and specific additives that ensure good workability, fast-setting times, and a high mechanical performance.

Absolutely even, level surfaces can be achieved so that tiles can then be laid swiftly and faultlessly using cement-based adhesives .

applications

substrates:
New or already existing mortar floor screeds.
Floor screeds made with fast-cem.
Concrete floor screeds or slabs.
Anhydrite floor screeds.
Interior floors.
Floors with built-in underfloor heating.
Commercial flooring.
Industrial flooring.
Raised flooring.

instructions for use

Mix with a power mixer in the stated ratio. Pour the product over the surface to be levelled and spread it out using a levelling trowel.

coverage

Consumption (kg/m²) 1,4 *
* per millimetre of thickness.

presentation

code	product	packaging (kg)	palet (kg)	price
B15901002	level 1 n	23	920	0,97€

23 kg.



uniprim

With uniprim, C2-type cement-based adhesives can be used to lay ceramic tiles quickly and efficiently on plaster, anhydrite and moulding plaster substrates. These substrates are incompatible with cement and need to be primed before coverings can be laid with these types of adhesives. uniprim reduces the level of absorption of highly absorbent substrates, preventing cement-based adhesives from drying out too quickly and thus ensuring that they set properly.

applications

substrates:
Plaster and anhydrite.
Moulding plaster.
Prefabricated plaster panels.
Concrete.
Cement mortar.
Cement-lime mortar.
Brick, ceramic and concrete blocks.
Before applying self-levellers.

instructions for use

Apply with a wide brush or roller over the entire surface to be treated. Thanks to the product's special colour, tile layers can easily identify those areas that have already been filled, thus speeding up the process.

Developed by butech's laboratories using top-quality raw materials. Solvent-free.

20l.



coverage

Consumption (gr/m²) 100 - 200 *
* depending on the substrate's level of absorption.

presentation

code	product	packaging (kg)	palet (kg)	price
B52501001	uniprim 4x5	4 x 5	480	4,31€
B52601001	uniprim 20	20	560	3,84€

unicem

A synthetic resin in an aqueous dispersion that enhances the overall mechanical performance and workability of cement-based mortars.

mortar additive



acid net

Acid cement remover. Removes all kinds of cement or plaster remains, saltpetre and efflorescence in general.

acid cleaner



unicem

When used for cement rendering, floor screeds and other applications in outdoor environments, it guarantees increased waterproof protection, reduced deformability and resistance to atmospheric agents.

uses

Floor screeds and cement rendering indoors and out, where a high degree of mechanical resistance and flexibility is needed.

Intermediate bond coats between new and old mortars.

Intermediate bond coats for levellers and self-levellers.

instructions for use

Cement rendering and floor screeds

unicem should be added to the mix in a proportion of 5%-10% of the total weight of the cement.

Bond coats

Prepare a liquid slurry of 1 part cement, 1 part unicem and 1 part water and apply to the surface to be treated with a wide brush or roller.

coverage

Consumption (kg/m²) 1,4 *
* per millimetre of thickness.

presentation

code	product	packaging (kg)	palet (kg)	price
B51603002	unicem 5	4 x 5	480	3,84€
B51604002	unicem 20	20	560	3,43€



5l. / 20l.

acid net

Acid Net is made of specific inorganic acids that make it ideal for removing cement-based remains.

2l. / 5l.



coverage

Aprox. 90-100 gr/m².

presentation

code	product	packaging (kg)	palet (kg)	price
B31202002	acid net 2	8x2	448	9,51€
B31502002	acid net 5	4x5	480	9,14€

materials

Ceramic and/or stone tiles resistant to acids.

uses

To remove surplus building materials from ceramic wall and floor tiles, both indoors and out.

instructions for use

It is advisable to dilute the product initially. The necessary concentration will depend on how dirty the tiles are. Spread evenly over the surface to be cleaned and leave to act for a few minutes. If necessary, rub off with a non-abrasive pad, rinsing afterwards with water. Repeat this operation until all the remains have been removed.

Before using the cement remover, perform a test to find the right concentration and check its effectiveness and resistance to acids on the surface to be cleaned.

Do not use before the grouting has set.

Consult the manufacturer when used on natural stone.

basic gel

A concentrated alkaline detergent, specially developed for cleaning ceramic tiles in general.



basic cleaner



basic gel

Basic gel is made of specific detergents and alkaline agents that make it ideal for removing domestic stains, grease and oil, for removing wax etc.

materials

Ceramic and/or stone tiles resistant to acids.

uses

An alkaline detergent for cleaning domestic stains and dirt from ceramic tiles, both indoors and out.

instructions for use

It is advisable to dilute the product initially. The necessary concentration will depend on how dirty the tiles are.

It can even be applied undiluted. Before it is used, a test should be performed to find the right concentration and check its effectiveness and the resistance of the dirt on the surface to be cleaned.

Spread evenly over the surface to be cleaned and leave to act for a few minutes. Rub with a non-abrasive pad or brush with plastic bristles, rinsing afterwards with water. Repeat this operation, if necessary, until all the remains have been removed.

2l. / 5l.



coverage

aprox. 85-100 gr/m².

presentation

code	product	packaging (kg)	palet (kg)	price
B31201001	basic gel	8x2	448	11,33€
B31501001	basic gel	4x5	480	10,91€

tile laying tips

introduction

Ceramic tiles are not a finished product in themselves. Customers can only appreciate the design, quality and high performance of ceramic tiles if they have been properly laid, both from a technical and aesthetic standpoint.

Final customer satisfaction is dependent on correct tile laying systems.

Most complaints are due to the improper handling of the tiles and their faulty installation.

Given all the above, a series of preliminary factors need to be taken into account in order to ensure that tiles are properly laid.

For this to be achieved, the ceramic tiles must be laid by a professional of proven experience, with a good working knowledge of the materials to be used.

At the same time, the right tile laying methods must be used in order to ensure a high-quality finish and attractive result.

Thus the tile-laying technique that is recommended by butech and described in this catalogue is the thin-bed method.

This entails spreading an even layer of adhesive (just a few millimetres thick) over the substrate on which ceramic tiles are to be laid.

substrate

In the broad sense of the word, a substrate can be understood to mean the different elements that form the base of the final tiled surface.

The stability and adequate preparation of the substrate are vital in ensuring good results and long-lasting performance.

The main characteristics of a substrate are its:

Flatness.
Consistency.
Water absorption.
Surface texture.
Chemical compatibility.
Performance in the presence of water.
Cleanliness.
Moisture.

As well as bearing all the above in mind when checking the surface of the substrate, it is also important to take into account structural movements by the base substrate (mainly due to concrete shrinkage).

To limit this factor as much as possible, the full curing time for all structural elements should be observed.

However, a good understanding of this and all the other factors that are involved and the right choice of materials for preparing the substrate will make the tile layer's job easier, resulting in a high-quality tiled surface

flatness

Laying tiles using the thin-bed method requires an even, flat substrate. There should be no deviation in flatness of 2 mm or more, measured with a 2m straightedge.

Commonly used cement-based adhesives are usually applied using the thin-bed method.

Do not attempt to compensate for defects in the flatness of the substrate with the adhesive itself. To fix this problem, a cement mortar levelling layer should be applied on both floors and walls.

For floors, self-levelling mortars may also be used, since they ensure surfaces that are ideal for laying ceramic tiles.

In this way, the tile layer will work more effectively while also reducing the amount of adhesive that is used

tile laying tips

consistency

The adhesive to be used should bond firmly with both the substrate and the tiles. Having said that, it is equally important to ensure a consistent substrate, since the full weight of the tiles will be borne by the latter.

Using a nail or similar object, scrape the surface to check the substrate's level of consistency. Should the substrate crumble easily, with warping, cracking, flaking or similar defects, chip at it until a resistant support is found, before applying a levelling layer of mortar.

For substrates whose surface has a poor consistency, treat them with a consolidating primer to improve their resistance once the tiles have been laid.

water absorption

For them to set and harden, cement-based adhesives require a certain amount of water. If the substrate to which they are applied has a high absorption rate, these adhesives will not have the water they need to set properly, resulting in a low bonding strength and low consistency.

To solve this problem, a pore-sealing primer is recommended to reduce the substrate's absorption rate.

It must also be remembered that a substrate with a low absorption rate implies low porosity, thereby hindering the mechanical bonding action of cement-based adhesives.

In this case, it is necessary to chip at the substrate, apply a bond-enhancing primer or a high-performance cement-based adhesive with chemical bonding action, thereby making up for the lack of mechanical adhesion.

surface texture


The adhesive and the substrate must be chemically compatible in order to ensure good adhesion. For example, cement-based adhesives cannot be directly applied to plaster substrates since their composition is incompatible with plaster.

To solve this problem, primers must be used that avoid direct contact between the adhesive and the plaster. Other types of adhesives that do not contain cement, such as dispersion adhesives, may also be used on these types of substrates.

chemical compatibility

In the event of it being exposed to water (liquid or vapour), it is important for the substrate to remain stable and not to swell, break apart or exhibit any other defect that could adversely affect the final tiled surface.

To overcome this problem, many different types of materials are available for waterproofing substrates, thus avoiding contact with water.

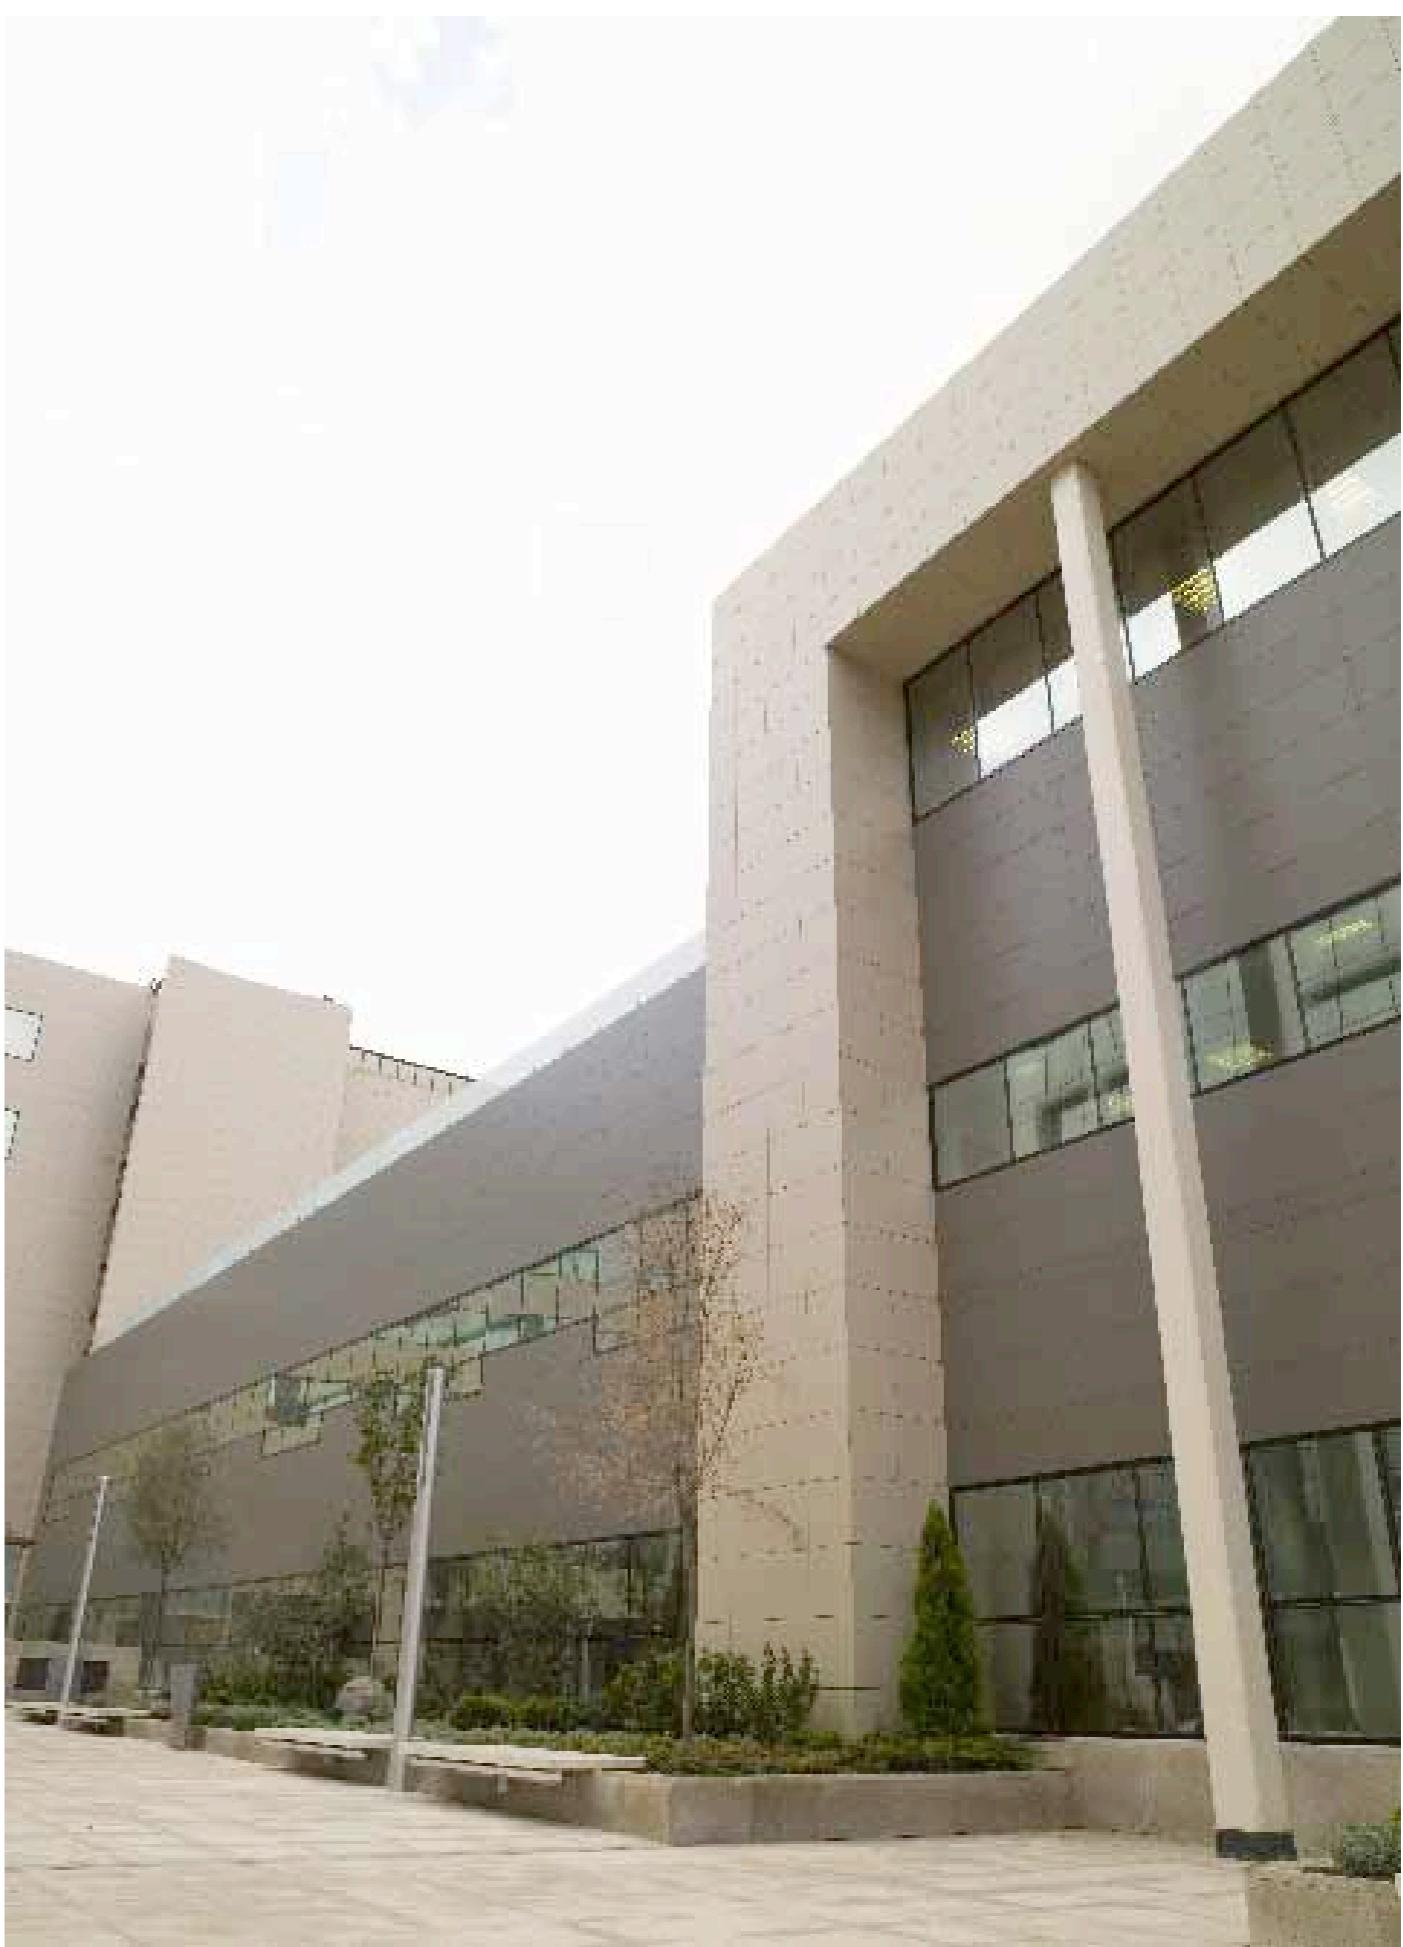

Showrooms international

A CORUÑA
A CORUÑA - SUMINISTROS VIA-MAR
Avda. Finisterre, 11. T: 981 279 431
BETANZOS - SUMINISTROS VIA-MAR
Avenida Fraga Iribarne, s/n. T: 981 772 190
FERROL - NEIRA & ORTEGAL S.L.
Carretera Catabois, 258. T: 981 326 532 - F: 981 324 951
ORTIGUEIRA - NEIRA & ORTEGAL S.L.
Carretera E-642 s/n, Cuiña. T: 981 400 880 - F: 981 400 883
SANTIAGO DE COMPOSTELA - PORCELANOSA
General Pardiñas, 13-Bajo. T: 981 569 230
SANTIAGO DE COMPOSTELA - JOSÉ OTERO
Rua Clara Campaomar, 13-15 (Montouto)-Teo
T: 981 509 270 - F: 981 819 334
SANTIAGO DE COMPOSTELA - PORCELANOSA
Pol. Comercial Costa Vella s/n. T: 981 897 595 - F: 981 530 901

ÁLAVA
VITORIA-GASTEIZ - JORGE FERNÁNDEZ
Los Herán, 30. T: 945 254 755 - F: 945 259 668
VITORIA-GASTEIZ - JORGE FERNÁNDEZ
Polígono Jundiz. Paduleta, 53. T: 945 244 250 - F: 945 229 321 ALBACETE
ALBACETE - PORCELANOSA
Avda. Gregorio Arcos, 32 (Polígono Campollano)
T: 967 243 658 - F: 967 193 465
VILLAROBLEDO - OLIVARES Materiales DE CONSTRUCCION
Avda. Reyes Católicos, 168. T: 967 138 105 - F: 967 138 023

ALICANTE
ALICANTE - PORCELANOSA
Pol. Las Atalayas, Parcela VI. Calle del Franco.
T: 965 109 561 - F: 965 106 965
ALTEA - MATERIALS CONSTRUCCIÓ ROCA
Avda. de la Nucía, 17. T: 965 841 507
BENISSÀ - HIJOS DE JUAN RIBES
Avda. de la Estación, 2. T: 965 730 419
CALPE - HIJOS JUAN RIBES
Avenida Ejércitos Españoles, Edificio Apolo VII, Local 10.
T: 965 839 105
DENIA - LLACER INSTALACIONES Y SERVICIOS
Pedreguer 10-12. T: 965 781 635 - F: 965 789 821
ELCHE - PORCELANOSA
Avda. Alicante, 105 T: 966 610 676 - F: 966 610 700
JAVEA - AZULEJOS JAVEA
C/Liverpool, 4. T: 965 791 036
LA NUCÍA - ELDECÓ FLORENZO CABALLERO
Carretera Benidorm-La Nucía, km 9. (Complejo Trópico).
T: 966 874 360
SAN JUAN - PORCELANOSA
Carretera Valencia, km 88. T: 965 656 200 - F: 965 655 644
TORREVIEJA - PORCELANOSA
Avda. Cortes Valencianas, 58 Esq., Crucero Baleares.
T: 966 708 445 - F: 965 718 722

ALMERÍA
ALMERÍA - PORCELANOSA
Avenida Mediterráneo, 2º tramo. T: 950 143 567 - F: 950 142 067
EL EJIDO - PORCELANOSA
Ctra. N-340, km. 411. T: 950 483 285 - F: 950 486 500
VICAR - PORCELANOSA
Centro Comercial Viapark, Parcela 1. T: 950 325 575 - F: 950 338 651

ASTURIAS
OVIEDO - PORCELANOSA
Pol.Espíritu Santo C/ Dinamarca s/n. T: 985 791 526 - F: 985 985 963
ÁVILA
ÁVILA - PAVIMARSA
Pol. industrial Vicolozano - Parcela 2. T: 920 259 820 - F: 920 259 821

BADAJOZ
MÉRIDA - PORCELANOSA
Avenida Reina Sofía, 8. T: 924 330 218 - F: 924 330 315
BADAJOZ - GALLERY CERAMIC
Carretera N-V Madrid-Lisboa, km 399. T: 924 229 144 - F: 924 229 143
AZUAGA - CORVILLEN VERA
Pol. Industrial Parcela S. T: 924 892 579 - F: 924 890 688
LLERENA - CERAMIC
C/Convento Santa Isabel, 2 Local Comercial. T: 924 108 318

BARCELONA
L'HOSPITALET DE LLOBREGAT - PORCELANOSA
Cíencies, 65. Gran Vía l'Hospitalet. T: 932 462 500 - F: 932 007 036 CALAF - PLANELL
Ctra. Manresa Km.31. T: 938 698 750 - F: 938 600 181
CANOVELLES - COMERCIAL MAESTRO CANET
Pol. Can Castells, nau 7-8. T: 938 466 568 - F: 938 409 216

MANRESA - PRAT MATERIALS I MAQUINARIA
C/Mossen Jacint Verdague, 26. T: 938 741 903 - F: 938 741 903
NAVARA - PRAT MATERIALS I MAQUINARIA
C/ De Mujar, 52. T: 938 204 033 - F: 938 204 098
PINEDA DE MAR - AMARGANT PINEDA
Santiago Rusiñol, 96. T: 937 671 416 - F: 937 670 894
SABADELL - CASANOVA
Avda. Rafael Casanova 24 T: 937 481 015 - F: 937 274 834
ST. BOI DE LLOBREGAT - GARRO

Ctra. Sta. Creu de Calafell, km. 10,7. T: 936 545 952 - F: 938 400 620
ST. FRUITOS DE BÀGELS - CASANOVA
Ctra. De Manresa a Berga Km.1. Naus 2-7.
T: 938 770 625 - F: 938 776 530
ST. PERE DE RIBES - SUMCO
Ctra. De Barcelona C-246 Km, 42,4 T: 938 933 016 - F: 938 741 066
SANT POL - AMARGANT SANT POL
Passeig Parc, 1. T: 937 600 112 - F: 937 600 411
TARADELL - JODUA
Ctra. De Vic, Km 5,8. T: 938 800 800 - F: 938 126 054
TERRASA - CASANOVA
Avda Can Jofresa, nau 4-5. Cant Ptge. Marie Curie
T: 902 934 094 - F: 902 934 099
TORELLÓ - JOAN DOT
C/Ter, 50. T: 938 504 646 - F: 938 504 286
VILANOVA DEL CAMÍ - PLANELL
Ctra. Vilafanca 108-111. T: 938 060 240 - F: 938 060 239
VILLAFRANCA - SUMCO
Pol. Ind. Domenys II. Avda. Tarragona 136.
T: 938 933 066 - F: 938 936 004

BURGOS
MEDINA DE POMAR - CERÁMICA DE LAS MERINDADES
Avda. Bilbao, 11. T: 947 192 081 - F: 947 192 082
MIRANDA DE EBRO - JORGE FERNANDEZ
Camino Fuente Basilio, s/n. T: 947 323 351 - F: 947 314 589
BURGOS - BIGMAT FONTECHA
Alcalde Martín Cobos, 15. Nave 5 y 6. T: 947 483 902 - F: 947 483 941

CÁCERES
CÁCERES - PORCELANOSA
Avda. Juan Pablo II, 130. T: 927 236 337 - F: 927 236 205
MORALEJA - BIGMAT CAYUELA
Avda. Extremadura, 26. T: 927 515 198 - F: 927 147 266
PLASENCIA - ALICATADORES ROMU S.A.
Avda. del Valle, 59. T: 927 426 493 - F: 927 426 495

CÁDIZ
EL PUERTO DE SANTA MARÍA - PORCELANOSA
Pol. El Palmer. Carretera Madrid-Cádiz, km 653,2.
T: 956 540 084 - F: 956 872 464
ALGECIRAS - PORCELANOSA
Ctra. de Málaga, km 109. T: 956 635 282 - F: 956 635 285
JEREZ DE LA FRONTERA - PORCELANOSA
Carretera N-IV. Parque Empresarial, parcela D1.

OLVERA - ALMECOR
C/Llana, 47. T: 956 120 776 - F: 956 120 776
SAN FERNANDO - PORCELANOSA
Polígono Tres Caminos, s/n. T: 956 592 360 - F: 956 884 677
UBIRUEJA - DOCURRI
C/ Fernando Quiñones, 1. T: 956 461 838 - F: 956 460 384
VILLAMARTÍN - AZULGRIF
C/ Rosario, 9. T: 956 730 687 - F: 956 730 911

CANTABRIA
SANTANDER - PORCELANOSA
Avenida Parayas, s/n. T: 942 352 510 - F: 942 352 638
TORRELAVEGA - PORCELANOSA
Boulevard Demetrio Herrero, 1. T: 942 835 026 - F: 942 881 787

CASTELLÓN
CASTELLÓN DE LA PLANA - PORCELANOSA
Asensi, 9. T: 964 239 162 - F: 964 238 930
VILLARREAL - PORCELANOSA
Ctra. Vila-real - Puebla de Arenoso (CV-20) Km. 0,7
T: 964 506 800 - F: 964 525 418
VINAROZ - PORCELANOSA
Carretera N-340, km 1.050,1. T: 964 400 944 - F: 964 400 650

CEUTA
CEUTA - BAEZA.
Ampliación muelle de Poniente, 96. T: 956 511 312 - F: 956 511 309

CIUDAD REAL
CIUDAD REAL - PORCELANOSA
Carretera de Carrilón, Km.1. T: 926 251 730 - F: 926 255 741
ALCAZAR DE SAN JUAN - PORCELANOSA
Corredora, 56. T: 926 546 727 - F: 926 546 727

TOLEDO
TOMELLOSO - PORCELANOSA
Avda. de los industriales, parcela 9.
T: 926 529 206 - F: 926 529 207

CORDOBA
CORDOBA - PORCELANOSA
Ctra. Nacional IV Km.404. Pol. de Torrecilla.
T: 957 760 024 - F: 957 760 123
CASTRO DEL RIO - JOSE SANCHEZ CARRETERO
Ronda Vieja Salud, 68. T: 957 372 775 - F: 957 372 775

LUCENA - FRAPECO DECO S.L.
Ejido Plaza de Toros. T: 957 509 334
POZOBLANCO - ACAINAS CABRERA
Ctra. pozoblanco-Alcaracejos Km 3,3
T: 957 772 999 - F: 957 131 170

VILLA DEL RIO - JUAN PRIETO E HIJOS S.L.
Ctra. Bujalance, s/n T: 957 177 693 - F: 957 177 335
CUENCA
CUENCA - PORCELANOSA
Hermanos Beccerril, 6 bajo. T: 969 233 200 - F: 969 234 475
CASAS DE HARO - MAT. CONST. MARTINEZ ORTEGA
C/Dos de Mayo, 28. T: 969 380 708 - F: 969 380 708
TARANCÓN - VICENTE DE LOS RIOS S.A.
Avda. del Progreso, 19. T: 969 321 323 - F: 969 321 334
VILLANUEVA DE LA JARA - ALMACENES PAÑOS S.L.
Camino de Rubielos, 8. T: 967 498 000 - F: 967 498 000

GIRONA
BLANES - BRECOR SL
Ctra.Tordera,79. Blanes. T: 972 336 062 - F: 972 358 482
CORNELLA DEL TERRI - OLIVERAS
Ctra. De Girona a Banyoles Km, 12,8.
T: 972 594 131 - F: 972 594 552
ESCLANYA-BEGUR - Materiais CREIXELL
C/Palafrugel Regencos P.J. Riera Esclanya, 1.

BURGOS
FIGUERES - OLIVERAS
Ctra. N-II Km. 759. T: 972 672 259 - F: 972 672 255
LES PRESSES - OLIVERAS
Pol. Ind. Les Preses. Parcela.II.20.
T: 972 694 704 - F: 972 693 003
PALOL D'ONYAR-QUART - OLIVERAS
Ctra. Comarcal C-250 Km, 4,3. T: 972 468 119 - F: 972 468 123

CÁDIZ
ARMILLA - TECMACER
Avenida San Rafael. (Junto Sprinter).
T: 958 253 081 - F: 958 183 367
GUIPÚZCOA
SAN SEBASTIÁN - JORGE FERNÁNDEZ
Polígono Belartzka. Fernando Múgica, 15.
T: 943 376 966 - F: 943 376 841

HUELVA
HUELVA - PORCELANOSA
Ctra. de Tráfico Pesado, s/n Pol. La Paz.
T: 959 543 600 - F: 959 234 652
HUESCA
FRAGA - BERGES CENTRO COMERCIAL
Avda. Aragón, 70. T: 974 471 439 - F: 974 471 439
HUESCA - PORCELANOSA
Pol. Sepes. C/ Ronda la Industria 1-3 nave C.
T: 974 242 738 - F: 974 242 676

ILLES BALEARS
PALMA DE MALLORCA - PORCELANOSA
Gran Via Asimá, 21 Pol. Son Castelló.
T: 971 430 667 - F: 971 297 094
INCA (MALLORCA) - PORCELANOSA
C/Pagess s/n. Pol. Inca. T: 971 507 650 - F: 971 507 656
LLUÇMAJOR (MALLORCA) - MAGATZEM SES FORQUES
C/ Doctor Fleming, 10, T: 971 662 114 - F: 971 662 816
SOLLER- C'AN SOLER
C/del Mar,193. T: 971 630 219
MANACOR- GALMES
C/Via Palma. T: 971 1554 502
CALA D'OR- MACODOR
Ctra. Cullera-Cala D'or. T: 971 658 210
ANDRAITX- TUCASA
C/Habana. T: 971 136 476

MURCIA
MURCIA - PORCELANOSA
Avda. Juan de Borbón, s/n. Parque Comercial Thader.
T: 968 879 527 - F: 968 831 725
CARAVACA DE LA CRUZ - PORCELANOSA
Río de la Villa, 3. Pol. Industrial. T: 952 701 819 - F: 952 843 751
MARBELLA - PORCELANOSA
Avda. Ricardo Soriano, 65. T: 952 826 868 - F: 952 822 880

MÁLAGA
MÁLAGA - PORCELANOSA
Avda. Velázquez, 77. T: 952 241 375 - F: 952 240 092
ANTEQUERA - PORCELANOSA
Río de la Villa, 3. Pol. Industrial. T: 952 701 819 - F: 952 843 751
MARBELLA - PORCELANOSA
Avda. Ricardo Soriano, 65. T: 952 826 868 - F: 952 822 880

MURCIA
MURCIA - PORCELANOSA
Avda. Juan de Borbón, s/n. Parque Comercial Thader.
T: 968 879 527 - F: 968 831 725
CARAVACA DE LA CRUZ - PORCELANOSA
Avenida Ctra. Granada, 20. T: 968 705 647 - F: 968 705 648
CARTAGENA - PORCELANOSA
C/ Belgrado. Parcela 81. Pol. Ind. Cabezo Beaza.
T: 968 529 302 - F: 968 528 362
LORCA - PORCELANOSA
Ctra. de Granada, 127. Polígono Los Peñones.
T: 968 478 130 - F: 968 470 820
YELCA - PORCELANOSA
Avenida de la Paz, 195. T: 968 718 048 - F: 968 718 048

NAVARRA
MULTIVA BAJA - MONTEJO CERÁMICAS
Pol. Ctra. Tajanor, Calle 2, Naves 2-4.
T: 948 239 065 - F: 948 230 503
CINTRUENIGO - CERÁMICAS CECILIO CHIVITE
Pol. Ind. s/n. Variante N-113. T: 948 811 973 - F: 948 815 249
PAMPLONA - MONTEJO CERÁMICAS
Navas de Tolosa, s/n. T: 948 224 000 - F: 948 226 424
TUDELA - MONTEJO CERÁMICAS
Ctra. Tudela-Tarazona. Pol. Centro de Servicios de Tudela.
T: 948 848 365 - F: 948 848 573

OURENSE
OURENSE - BLANCO QUINTAS
C/ Nosa Señora da Sainza, 48. T: 988 391 114 - F: 988 250 413
CARBALLINO - JOSE R. PITEIRA,S.L.
Avda. Julio Rodriguez Soto, 63. T: 988 271 071 - F: 988 274 780
LA RIOJA
LOGROÑO - RIOJACER
Avenida de la libertad, 88. T: 953 795 168 - F: 953 795 168
VILLACARRILLO - MAT. CONST. Y SAN. HIJOS MARTIN SANCHEZ
Ctra. José Rodero Mataran, 53. T: 953 454 167

LAS PALMAS

Showrooms international

LAS PALMAS DE GRAN CANARIA - PORC. Y PAV. CANARIOS
Avenida Mesa y López, 63. T: 928 472 949 - F: 928 472 944
LEÓN
SAN ANDRÉS DE RABANEDO - PORCELANOSA
Ctra. León-Astorga, km 3,5

Showrooms international

albania
tirana - alba ceramica porcelanosa grupo
t: +355 42233817 - f: +355 42233817

alemania

aschaffenburg - kalkwerke
t: +49 (0) 60 213 601 62 - f: +49 (0) 60 213 602 93
bad salzuflen - w. linnenbecker gmbh
t: +49 (0) 5222 / 5301 221 - f: +49 (0) 5222 / 5301 209
bautzen - fliesen lehmann gmbh
t: +49 (0) 3591 / 3726 32 - f: +49 (0) 351 / 8931420
beeskow - baderbaustoffe & werkzeuge, handelsgeellschaft gmbh +49 (0) 3366 / 4170 - f: +49 (0) 3366 / 41790

bergisch gladbach - schmidtrudersdorf gmbh & co
t: +49 (0) 2204 / 4007 0 771 - f: +49 (0) 3320 / 854715

berlin - w. linnenbecker gmbh & co. kg

t: +49 (0) 30 / 756 888 - f: +49 (0) 30 / 756 888 756
berlin - fliesenparadies glaeske + seifzig gmbh

t: +49 (0) 30 650 737 0 - f: +49 (0) 30 650 737 34
berlin - berliner fliesenmarkt gmbh

t: +49 (0) 30 326 725 10 - f: +49 (0) 30 326 725 58
boffen - hermann bach gmbh & co. kg

t: +49 (0) 5271 / 955 251 - f: +49 (0) 5271 / 955 200
bottrop - w. linnenbecker gmbh & co. kg

t: +49 (0) 2041 / 7958 13 - f: +49 (0) 2041 / 7958 10

bruchsal - taxis - bruchsai

t: +49 (0) 72 518 005 0 - f: +49 (0) 72 518 005 40

burgstadt - fliesen thomas fliesengroßhandel gmbh

t: +49 (0) 3724 / 1856 0 - f: +49 (0) 3724 / 1856 70

craisheim - taxis - craisheim

t: +49 (0) 7951 301 0 - f: +49 (0) 7951 301 100

dortmund - w. linnenbecker gmbh & co. kg

t: +49 (0) 231 / 562 090 22 - f: +49 (0) 231 / 562 090 88

elterlein - fliesenhaus muller

t: +49 (0) 37349 / 7305 - f: +49 (0) 37349 / 6093

erfurt - fliesenzentrum erfurt

t: +49 (0) 361 427070 - f: +49 (0) 361 427077

erkath - w. linnenbecker gmbh

t: +49 (0) 211 / 92503 19 - f: +49 (0) 211 / 92503 34

frankfurt - j. n. köbig gmbh - frankfurt

t: +49 (0) 69 559 645 5 - f: +49 (0) 69 559 645 79

freiburg - goitz & moriz gmbh

t: +49 (0) 76 145 180 - f: +49 (0) 76 145 711 2

fulda - oswald keramik und stein gmbh

t: +49 (0) 66 194 151 0 - f: +49 (0) 66 194 151 40

gera - baustoffe gebr. löffler gmbh

t: +49 (0) 365 430 701 9 - f: +49 (0) 365 430 701 4

görlitz - fliesen pedersen gmbh

t: +49 (0) 3581 / 402809 - f: +49 (0) 3581 / 409166

hamburg - lurup - croonen fliesenhandel gmbh

t: +49 (0) 40 / 83383 377 - f: +49 (0) 40 / 83383 301

karlsruhe - fliesen gehret

t: +49 (0) 93 539 731 0 - f: +49 (0) 93 539 731 26

kehl / rhein - taxis - kehl

t: +49 (0) 78 519 383 16 - f: +49 (0) 78 519 383 20

koblenz - j. köbig gmbh - koblenz

t: +49 (0) 26 198 169 20 - f: +49 (0) 26 198 169 10

kranicfeld - mühl 24 - kranicfeld

t: +49 (0) 36 450 330 - f: +49 (0) 36 450 332 89

löbnitz - sachsenkeramik gmbh

t: +49 (0) 34208 / 7400 - f: +49 (0) 34208 / 7400

lübeck - heinrich's fliesenmarkt

t: +49 (0) 451 8966693 - f: +49 (0) 451 8973494

mainz - j. n. köbig gmbh - mainz

t: +49 (0) 61 313 942 27 - f: +49 (0) 61 316 942 75

meschede - w. linnenbecker gmbh & co. kg

t: +49 (0) 291 / 952 82 21 - f: +49 (0) 291 / 952 82 82

münchen - ceramicas ohg

t: +49 (0) 89 318 280 0 - f: +49 (0) 89 318 280 20

münster - w. linnenbecker gmbh & co. kg

t: +49 (0) 251 / 979 1221 - f: +49 (0) 251 / 979 1220

nordhausen - hermann bach gmbh & co. kg

t: +49 (0) 3631 / 633 126 - f: +49 (0) 3631 / 633 143

nürnberg/hafen - heinrich christ gmbh & co. kg

t: +49 (0) 91 164 318 0 - f: +49 (0) 91 164 318 50

plauen - matthias schlüch

t: +49 (0) 374 1203 881

potsdam/fabrikland - keanakeramik-gmbh

t: +49 (0) 33208 / 547 16 - f: +49 (0) 33208 / 547 15

radebeul - fliesen lührich & co. gmbh

t: +49 (0) 351 / 89314 10 - f: +49 (0) 351 / 89314 20

reutlingen - taxis - reutlingen

t: +49 (0) 71 219 884 0 - f: +49 (0) 71 219 884 40

ronnenberg - empelde - w. linnenbecker gmbh & co. kg

t: +49 (0) 511 / 438 90 36 - f: +49 (0) 511 / 438 90 49

schrämberg - sulgen - ambruster gmbh

t: +49 (0) 7422 28008 - f: +49 (0) 7422 28008 - 20

stuhr-moerderch - norbert bang

t: +49 (0) 42 156 591 78 - f: +49 (0) 42 156 591 79

stuttgart - taxis - stuttgart

t: +49 (0) 71 189 001 121 - f: +49 (0) 71 189 003 104

völklingen - niedere gmbh

t: +49 (0) 68 898 802 21 - f: +49 (0) 68 898 802 30

vs-schwenningen - taxis - schwenningen

t: +49 (0) 77 206 927 0 - f: +49 (0) 77 206 927 35

weinsberg - bsf bau center gmbh

t: +49 (0) 71 349 130 - f: +49 (0) 71 349 131 00

wiesbaden-biebrich - j. n. köbig gmbh - wiesbaden

t: +49 (0) 611 27810 - f: +49 (0) 611 25674

zwethau - gramer gmbh

t: +49 (0) 3421 / 7327 18 - f: +49 (0) 3421 / 7326 73

angola
luanda-porcelanosa angola
t: +244931173551 - f: +244222372374

arabia saudi
jeddah - manart al andalos est
t: +966 2 629 3402 - f: +966 2 629 3416
riyadh - manart al andalos est
t: +966 1 282 1500

argelia
alger - novaca
t: +00213 2121 1939 - f: +00213 2121 1939

argentina

buenos aires - nestor o. macagno
t: +54 11 477 630 08 - f: +54 11 477 630 08
buenos aires - blaisten s.a.
t: +54 11 463 620 00 - f: +54 11 463 614 86
mar del plata - imephos s.a.
t: +54 02 234 813 827 - f: +54 02 234 813 827
mendoza - victor jose guillo
t: +54 26 143 142 00 - f: +54 26 143 142 00

australia
oceania:
australian representative - australian factory representative
t: +61 8 1186244 - f: +61 8 1186220

new south wales:
newcastle west - earp bros
t: +61 2 4925 4555 - f: +61 2 4929 4932
sydney - earp bros
t: +61 2 4962 2500 - f: +61 2 9410 2011

queensland:
brisbane - telescope imports
t: +61 7 3371 5777 - f: +61 7 3371 5133

australia
british columbia:
vancouver - fontile distributors
t: +604 683 9358 - f: +604 683 6758

south australia:
adelaide - italia ceramics
t: +61 8 8336 2366 - f: +61 8 8336 9016

tasmania:
hobart - rossetto tiling
t: +61 7 3852 4444 - f: +61 7 3852 4344

south australia:
moncton - dominion tile & supplies
t: +506 857 8906 - f: +506 857 4149

ontario:
woodbridge - streamline sales & marketing inc.
t: +905 850 1508 - f: +905 850 1509

canada
santiago de chile - budnik hermanos s.a.
t: +56 2 398 0100 - f: +56 2 212 3058

china
beijing - po yick building materials co. ltd
t: +86 10 8527 1313 - f: +86 10 6422 9976

china
chengdu - de-hua sanitaryware
t: +83 316 262 524 0 - f: +83 316 262 524 22

china
linz - beinkofner
t: +43 732 776 543 0 - f: +43 732 776 543 0

china
salzburg - sturmberger keramikagentur
t: +43 662 879 322 - f: +43 662 872 389

azerbaiyan
baku - aksesuar porcelanosa grupo
t: +944 12 4973103 - f: +944 12 4474383

bangladesh
dhaka - sas progressive co.
t: +88-02-8813796 - f: +88-02-8713501

bahrain
manama - al abbas gallery
t: +973 741 919 - f: +973 741 747

bélgica
heist-op-den-berg -

Showrooms international

tehran - farbar co.ltd.
t: +98 21 88 03 6364 - f: +98 21 88 03 8283

ireland
cork - original bathroom & tiles
t: +353 0 214 310 000 - f: +353 0 214 310 003
dublin - tilestyle ltd
t: +00 353 1 8555200 - f: +00 353 1 8557471
porosa tile distribution ltd
t: +353 (087) 0909977 - f: +353 (087) 6335551
isla de la reunion (francia)
saint denis - ravate professionnel sas
t: +262 904 024 - f: +262 904 057
saint pierre - ravate professionnel sas
t: +262 961 517 - f: +262 255 465

islandia
reykjavik - alfabborg ehf
t: +354 568 6755 - f: +354 568 1277

israel
israel representative - yechiel topolski
t: +972 5 2327 6095 - f: +972 4 811 1729
haifa - topolski & co ltd.
t: +972 4 904 0496 - f: +972 4 904 0455
bney brak - hezi bank
t: +972 3 616 6641 - f: +972 4 904 6643
modin - levy bros ceramics importers ltd
t: +972 3 973 9977 - f: +972 3 973 9933
raanana - amoz nagar imp. mark. ogen ltd.
t: +972 9 760 1501 - f: +972 9 741 1997
rishon le zion - negev ceramics
t: +972 9 943 6676 - f: +972 9 6661
jerusalem - bar-ami 1990 ltd.
t: +972 2 531 3444 - f: +972 2 538 3740

italia
bari:
andria - midil-ceramiche s.a.s
t: +39 08 835 66466 - f: +39 08 835 49260
milano:
corsico - porcelanosa lombardia s.p.a
t: +39 02 458 64310 - f: +39 02 458 64415
modena:
sassuolo - porcelanosa s.p.a
t: +39 05 368 06677 - f: +39 05 368 02184
roma:
roma - porcelanosa roma s.p.a
t: +39 06 888 9977 - f: +39 06 888 7056

jersey
st. saviour - pastella group
t: 01534 870167 - f: 01534 723199

jordanie
amman - ayman abdallat & partners co.
t: +962 65 672 376 - f: +962 65 672 476

kazajistán
almaty - tisaco
t: +7 327 273 3848 - f: +7 327 258 1169
almaty - noel
t: +7 327 242 1447 - f: +7 327 2501642
almaty - sheber-market ltd
t: +7 327 24353 86 - f: +7 327 24324 64
stroymart - karaganda
t: (312) 563 333

kosovo
prishtina - n p kerasan
t: +381 38 602 667 - f: +381 38 602 667

kuwait
safat - hassan abul hassan sadiq
t: +965 262 4466 - f: +965 265 1444

letonia
riga - tormanis un partneri
t: +371 784 5361 - f: +371 784 5360

libano
libano - geahchan group
t: +961 1480520 - f: +961 1496607

libia
benghazi - el ragoubi
t: 218 61 3370895 - f: 218 61 2237328
tripoli - el ragoubi
t: 218 91 3274885

lituania
alytu - iris ltd
t: +370 315 55969 - f: +370 315 55968

macedonia
skopje - porca mak
t: +389 2 246 4164 - f: +389 2 246 3390

malta
birkirkara - roger satariano & sons ltd
t: +356 21 442 769 - f: +356 21 497 017

malasia
uala lumpur - apex ceramics city
t: 603 4043 8333 - f: 603 4044 3339

marruecos
casablanca - ceramek
t: +00212 945 3646166 - f: +00212 522 395363
casablanca - sanitaire 2000
t: +212 22 363 225 - f: +212 22 394 100
marrakech - ar'chi
t: +212 5 2430299 - f: +212 5 24335954
rabat - ar'chi
t: +212 5 37792197 - f: +212 5 37792202
tanger - facenor s.a.
t: +212 39 941 910 - f: +212 39 945 445

martinica (antillas francesas)
lamentin - joseph cottrell s.a.
t: +596 509 810 - f: +596 506 524

méxico
interlamos - porcelanosa méxico
t: (+55) 36 05 00 84 - (-55) 36 05 00 65 - (+55) 36 05 00 67
tlalnepantla - porcelanosa méxico
t: (+55) 26 20 04 62 - (-55) 26 20 09 58

moldavia
chisinau - plimed (casamodera)
t: +373 2 2501252/54/55/56 - f: +373 2 2716824

montenegro
bar - vjp homes
t: +382 304 100 - f: +382 340 900

nepal
katmandu - bajra & bajracharya ent.
t: +977 1 552 4851 - f: +977 1 552 4851

nicaragua
managua - deco center - grupo iberica nicaragua
t: +505 270 2121 - f: +505 277 0834

nigeria
lagos - victoria islands-pn lifestyle
t: +23 480 552 63043 - f: +23 480 222 38012

noruega
oslo - fagflis
t: +47 22 808 560

nueva zelanda
auckland - tileco ltd
t: +64 9 573 5736 - f: +64 9 573 5737

paises bajos
venlo - pgn ceramica b.v.
t: +32 (0)15 253366 - f: +31 (0)15 253367

pakistan
karachi - s. abdulla & co.
t: +92 21 585 0490 - f: +92 21 585 0230

panamá
panama - cocinas italianas s.a. - spazio
t: +507 214 3756 - f: +507 264 2542

perú
lima - cassinelli
t: +51 14 513 712 - f: +51 15 612 757

polonia
bialystok - akcess
t: +48 85 6643436 - f: +48 85 6643434

portugal
lisboa - cassinelli
t: +48 33 822 0449 - f: +48 33 822 0449

romania
iasi - cerasan
t: +40 24 107 800 00 - f: +40 24 107 800 99

south east:
croydon - porcelanosa south east

spania
catalunya - cerasan
t: +44 0844 481 8953 - f: +44 0844 481 8963

spain
valencia - cerasan
t: +44 0844 481 8952 - f: +44 0844 481 8962

spain
valencia - cerasan
t: +44 0844 481 8951 - f: +44 0844 481 8961

spain
valencia - cerasan
t: +44 0844 481 8954 - f: +44 0844 481 8964

spain
valencia - cerasan
t: +44 0844 481 8956 - f: +44 0844 481 8966

spain
valencia - cerasan
t: +44 0844 481 8970 - f: +44 0844 481 8973

spain
valencia - cerasan
t: +44 0844 481 8971 - f: +44 0844 481 8975

spain
valencia - cerasan
t: +44 0844 481 8974 - f: +44 0844 481 8978

spain
valencia - cerasan
t: +44 0844 481 8975 - f: +44 0844 481 8979

spain
valencia - cerasan
t: +44 0844 481 8980 - f: +44 0844 481 8984

spain
valencia - cerasan
t: +44 0844 481 8981 - f: +44 0844 481 8985

spain
valencia - cerasan
t: +44 0844 481 8982 - f: +44 0844 481 8986

spain
valencia - cerasan
t: +44 0844 481 8983 - f: +44 0844 481 8987

spain
valencia - cerasan
t: +44 0844 481 8984 - f: +44 0844 481 8988

spain
valencia - cerasan
t: +44 0844 481 8985 - f: +44 0844 481 8992

spain
valencia - cerasan
t: +44 0844 481 8986 - f: +44 0844 481 8995

spain
valencia - cerasan
t: +44 0844 481 8987 - f: +44 0844 481 8998

spain
valencia - cerasan
t: +44 0844 481 8988 - f: +44 0844 481 8999

spain
valencia - cerasan
t: +44 0844 481 8989 - f: +44 0844 481 8990

spain
valencia - cerasan
t: +44 0844 481 8991 - f: +44 0844 481 8991

spain
valencia - cerasan
t: +44 0844 481 8992 - f: +44 0844 481 8992

spain
valencia - cerasan
t: +44 0844 481 8993 - f: +44 0844 481 8993

spain
valencia - cerasan
t: +44 0844 481 8994 - f: +44 0844 481 8994

spain
valencia - cerasan
t: +44 0844 481 8995 - f: +44 0844 481 8995

spain
valencia - cerasan
t: +44 0844 481 8996 - f: +44 0844 481 8996

spain
valencia - cerasan
t: +44 0844 481 8997 - f: +44 0844 481 8997

spain
valencia - cerasan
t: +44 0844 481 8998 - f: +44 0844 481 8998

spain
valencia - cerasan
t: +44 0844 481 8999 - f: +44 0844 481 8999

spain
valencia - cerasan
t: +44 0844 481 8990 - f: +44 0844 481 8990

spain
valencia - cerasan
t: +44 0844 481 8991 - f: +44 0844 481 8991

spain
valencia - cerasan
t: +44 0844 481 8992 - f: +44 0844 481 8992

spain
valencia - cerasan
t: +44 0844 481 8993 - f: +44 0844 481 8993

spain
valencia - cerasan
t: +44 0844 481 8994 - f: +44 0844 481 8994

spain
valencia - cerasan
t: +44 0844 481 8995 - f: +44 0844 481 8995

spain
valencia - cerasan
t: +44 0844 481 8996 - f: +44 0844 481 8996

spain
valencia - cerasan
t: +44 0844 481 8997 - f: +44 0844 481 8997

spain
valencia - cerasan
t: +44 0844 481 8998 - f: +44 0844 481 8998

spain
valencia - cerasan
t: +44 0844 481 8999 - f: +44 0844 481 8999

spain
valencia - cerasan
t: +44 0844 481 8990 - f: +44 0844 481 8990

spain
valencia - cerasan
t: +44 0844 481 8991 - f: +44 0844 481 8991

spain
valencia - cerasan
t: +44 0844 481 8992 - f: +44 0844 481 8992

spain
valencia - cerasan
t: +44 0844 481 8993 - f: +44 0844 481 8993

spain
valencia - cerasan
t: +44 0844 481 8994 - f: +44 0844 481 8994

spain
valencia - cerasan
t: +44 0844 481 8995 - f: +44 0844 481 8995

spain
valencia - cerasan
t: +44 0844 481 8996 - f: +4

butech.[®]
PORCELANOSA Grupo